
Interface manual - English

Vario II series



79.55.065 • July 2010

Technical modifications are subject to change without prior notice

SERIAL DATA TRANSMISSION.....	1
XON / XOFF - Protocol.....	1
Connector assignment (9-pin DSUB socket).....	1
Connecion RS 232	2
Connector assignment RS485 and RS422.....	3
PARALLEL DATA TRANSMISSION	4
Connection	5
ROTATION OF TEXT, CODE AND GRAPHIC	6
DATUMPOINT.....	6
DATA FORMAT.....	7
Explanations.....	8
Definition of field attributes/field properties (optional).....	9
Field names.....	10
Field selection by free definable field number.....	11
Foreground and background	12
MASK SET	13
Text	13
Standard code	14
2D bar codes	16
Rectangle	22
Line.....	22
Internal graphic.....	23
TEXT SET	24
GRAPHIC	26
General graphic format.....	26
Graphic in PCX format.....	27
VARIABLES	29
Set structure	29
Link field	29
Counter.....	30
Extended counter	31
Date / Time	32
Currency variable	36
Shift variable.....	37
User guiding	38
Memory card data.....	39
GS1-128 (EAN 128) Parser.....	39
EPC calculation (Electronic Product Code)	40

PARAMETER SETS.....	41
Label parameter	41
Label photocell	46
Dispensing photocell	47
Device settings	48
Interface	53
Offset values.....	55
Service functions	57
Date & Time.....	60
Password.....	63
Print	64
Remote console.....	68
Emulation	68
PARAMETER SETS FOR OPTIONS.....	69
Network	69
Memory Card.....	72
Cutter.....	75
Dispenser	76
Scanner	81
AUTOSTATUS	85
CHARACTER SETS.....	87
International ANSI character font.....	89
Codepage 437	90
Codepage 850	91
Codepage 852	92
Codepage 857	93
GEM German	94
GEM English.....	95
GEM French	96
GEM Swedish.....	97
GEM Danish	98
FONT EXAMPLES	99
Bitmap fonts (not proportional)	99
Bitmap fonts (proportional)	99
Vector fonts	99
INDEX	101

SERIAL DATA TRANSMISSION

XON / XOFF - Protocol

The XON / XOFF protocol is used in "memory"-mode. The XON-code (HEX 11) indicates that the printer is ready to receive data. When XOFF-code (HEX 13) is shown the transmission of data has to be interrupted. To avoid possible data loss some information will be stored into the data-memory. When receiving, that the memory is empty the XON-code (HEX 11) will be shown again.

Connector assignment (9-pin DSUB socket)




Pin	Signal	Beschreibung
2	R x D	Receiving data line
3	T x D	Transmitting data line
4	DTR	HW Handshake
5	GND	GND Signal

Connecion RS 232


Terminal assignment (cable)

XON / XOFF - report: e.g. connection to an IBM-compatible computer

1. printer (DSUB 9-plug) PC (DSUB 25-socket)

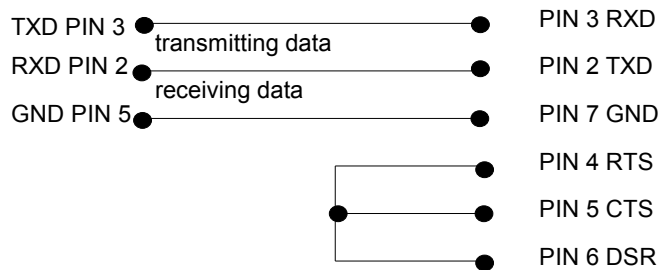


2. printer (DSUB 9-plug) PC (DSUB 9-socket)

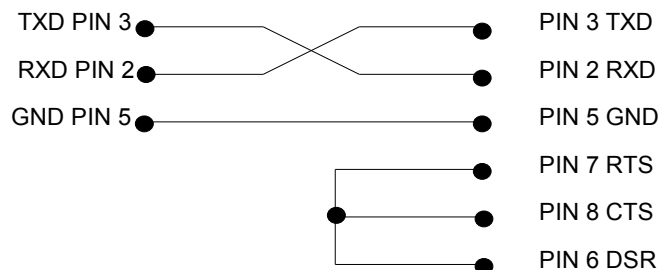


Hardware handshake:

1. printer (DSUB 9-plug) PC (DSUB 25-socket)

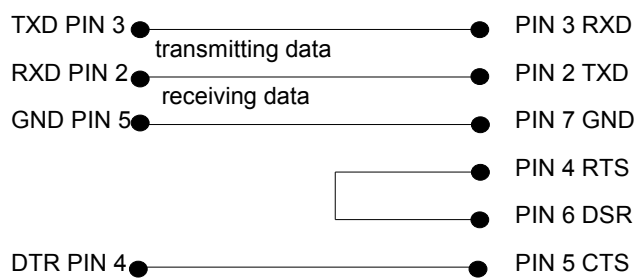

2. printer (DSUB 9-plug) PC (DSUB 9-socket)

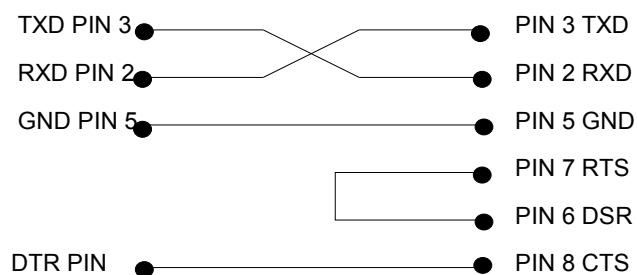

Connector assignment RS485 and RS422

9-pin DSUB socket)



PIN at DSUB socket	Function RS422 (full duplex)	Function RS485 (semi duplex)
1	GND	GND
2	n/c	n/c
3	n/c	n/c
4	RxD-	n/c
5	RxD+	n/c
6	n/c	TxD (RxD)-
7	n/c	TxD (RxD)+
8	TxD-	n/c
9	TxD+	n/c

PARALLEL DATA TRANSMISSION

Interface: parallel Interface

synchronising with STROBE - signal

handshake with BUSY - signal

all signals are TTL - compatible

Connection: AMPHENOL - plug 57-30360

PIN 1 In regular condition, this signal is in "HIGH" position. With decreasing amplitude the data acceptance is completed from DATA 1 DATA 8.

PIN 2 . . . 9 DATA 1 DATA 8
parallel data information

PIN 10 ACKNLG


PIN 11 In regular condition this signal is "LOW".
With decreasing amplitude of STROBE- signals,
BUSY will change onto "HIGH" - level.
This level will stay as long as the printer is busy
with the already received data byte.

Connection

AMP 36 (Centronic's socket)

Signal Pin-No.	Signal name	Direction	Function
1	<u>STROBE</u>	(input)	The <u>STROBE</u> signal indicates that data can be received. The impulse width to the receiving line has to be 0,5 μ s at least.
2	DATA 0	(input)	The signals are data bits sent to the printer. A HIGH level corresponds to logical 1 and a LOW level to logical 0.
3	DATA 1	(input)	
4	DATA 2	(input)	
5	DATA 3	(input)	
6	DATA 4	(input)	
7	DATA 5	(input)	
8	DATA 6	(input)	
9	DATA 7	(input)	
10	<u>ACKNLG</u>	(output)	An impulse of approx. 12 μ s confirms data input for a LOW level and signals the further listening watch of the printer.
11	BUSY	(output)	A HIGH level indicates that the printer cannot receive any data. On the following conditions the signal HIGH is possible: 1) for data input (impulse for each sign) 2) during a printing process 3) in Offline status 4) for printer failures
12	PE	(output)	A HIGH level indicates that paper is used up.
13	SELECT	(output)	High Online
14	AUTOFEED		
15	GND		
16	GND		Signal ground.
17	CHASSISGND		Mass, not connected with signal ground.
18	+ 5V		Approx. 4,8 V (max. 100mA)
19-30	GND		Return conductor for twisted pair conductors.
31	not used		-
32	<u>FAULT</u>	(output)	Signal goes to LOW, in case 1) the paper is used up 2) the printer is Offline or 3) an error occurs.
33	not used		
34	not used		
35	not used		
36	not used		


ROTATION OF TEXT, CODE AND GRAPHIC

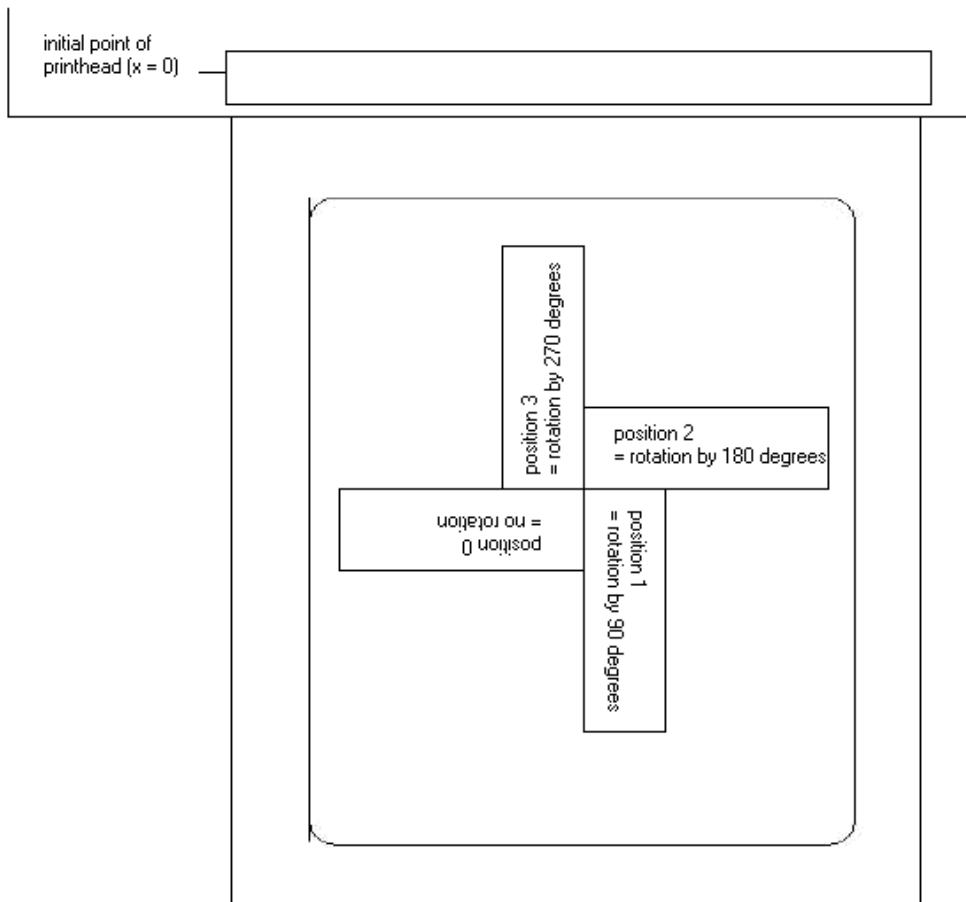

DATUMPOINT

The so-called datum point is the relation point for indication of position. In the meantime the datum point is also the point at which the selected object is rotated.

To determine the datum point in the mask sets, the possible datum points are numbered from left top (1) to right bottom (9). The default datum point is left bottom (7). This datum point is also used even if no indication is found in the mask set.

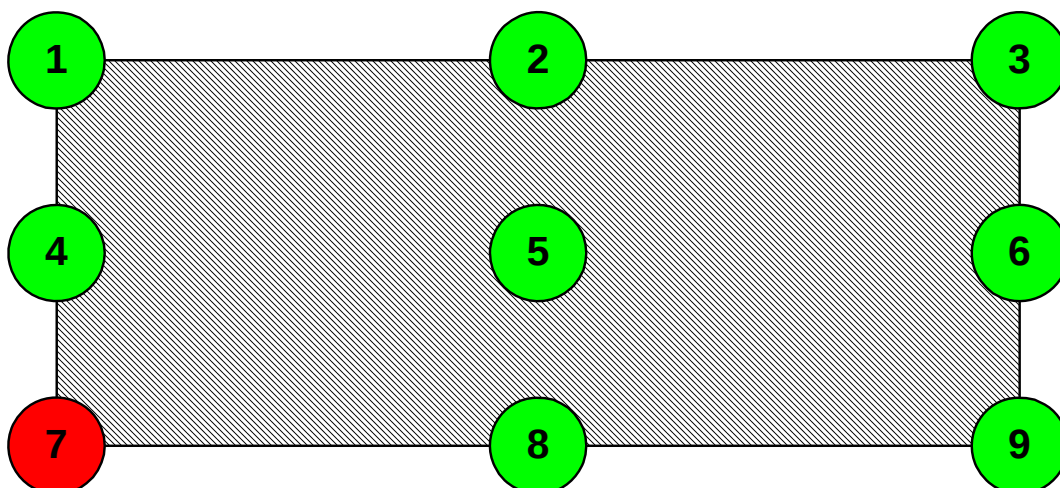

DATA FORMAT

The format of data consists of 4 parts, the mask part, the text, the code (if necessary) and the command part.

For a n-line label the following has to be transmitted:

n	mask sets
n	text sets
n	graphic sets (if necessary)
1	command set

The command set always has to be transmitted at the end!

To each text on a label belongs one MASK SET and one TEXT SET with the same field number.

To each code on a label belongs one MASK SET, one TEXT SET and one CODE SET with the same field number.

To each box or line on a label belongs only one MASK SET.

To each graphic on a label belong several GRAPHIC SETS according to its size res. height, e.g. a graphic with a height of 10 mm needs 80 graphic sets.

Examples:

label with 3 lines text:	3 mask sets 3 text sets 1 command set
label with 3 lines text and 1 code:	4 mask sets 4 text sets 1 code set 1 command set
label with 2 lines text, 1 box and 3 lines:	6 mask sets 2 text sets 1 command set

For all data sets the following is valid:

Each set starts with: **SOH = start of header** → HEX format 01

and ends with: **ETB = end of data transmission block** → HEX format 17

Alternatively it is possible to set SOH to 5E_{Hex} and ETB to 5F_{Hex}. This is necessary if the connected system (e.g. UNIX) cannot transfer control signs.

All other data sets → ASCII format, but they will be transmitted as hexadecimal characters.

Example: A = identification of mask set - transmission: 41_{HEX}
n = field number '01' - transmission: 30_{HEX}, 31_{HEX}

Explanations

x coordinate: distance from right label rim in mm
is measured from the right label rim up to the lower left point of the corresponding line

y coordinate: distance from upper label rim in mm
is measured from the beginning of the label down to the lower left point of the corresponding line

Bitmap fonts	bitmap fonts - not proportional (Matrix – mm)		
not proportional:	01 = FONT 01	0,8 x 1,1 mm	- 127 characters
	02 = FONT 02	1,2 x 1,7 mm	- 255 characters
	03 = FONT 03	1,8 x 2,6 mm	- 255 characters
	04 = FONT 04	4,0 x 5,6 mm	- 127 characters
	05 = FONT 05	1,8 x 3,2 mm - descender	- 255 characters
	06 = FONT 06	1,5 x 2,9 mm	- 127 characters
	07 = FONT 07	1,2 x 2,2 mm - descender	- 255 characters

Bitmap fonts	bitmap fonts – proportional		
proportional:	21 = FONT 21	1,0; 9 (1,0; 13)	- 255 characters
	22 = FONT 22	1,8; 14 (1,8; 21)	- 255 characters
	23 = FONT 23	2,6; 21 (2,6; 31)	- 255 characters
	24 = FONT 24	5,6; 45 (5,6; 67)	- 255 characters
	28 = FONT 28	4,0; 32 (4,0; 48)	- 255 characters
	29 = FONT 29	0,8; 6 (0,8; 9)	- 255 characters

To reach best print results it is recommended always to chose the biggest possible font.

Vector fonts*
proportional text: When in mode "proportional text", the height and width of text have to be entered in mm.
These values refer to the capital "M", i.e. the values of other characters are changing in proportion.

Vector fonts*
autoscale: When in autoscale mode, height and width of text has to be entered in mm.
The height of the text refers to all capital letters. When using small characters and descenders the height is changing in proportion. When entering the width, the complete file has to be considered. The text will be adjusted automatically, which means that the width of the characters is changing.

* only Vario II 107/12

Definition of field attributes/field properties (optional)

Explanation: Additionally to mask set 'AM[] ...' the possibility was created to define further field properties. In order to achieve a high flexibility, the field properties received own names/identifications. Therefore the sequence as well as the number of field properties are free. If necessary, the mask set 'AC[]' is transferred additionally to mask set 'AM[]' to the printer.

Structure mask set: (SOH)AC[]at1=*value*;at2= *value*;...(ETB)

Attribute (at):	Description
BT BW QZ	ITF 14 (see chapter 'Mask set ITF code') Bearer bar type Bearer bar width Quiet zone in 1/100 mm
NAME	Field name (see page 10) Definition of field name
FN	Field number (see page 11) Free definable field number
BGND FGND	Foreground and background (see page 12) Background of field Foreground of field

This table is constantly extended. The current version is available on demand.

Field names

Application (customized)


1. The label is created with Labelstar PLUS.
2. Label data are saved on memory card of printer.
3. An external control (SPS, balance, ERP system, etc.) modifies variable fields of the label (e.g. weight, article no., batch no., etc.) and starts the print of label.

Explanation


So far the fields were designated by numbers (1, 2, 3, ...) which were determined by the order of creation in Labelstar PLUS. By later modifications of label, these field numbers were possibly changed whereby the access to a certain field was no longer possible. By the field names this dependence is annulled.

Procedure

- a) Labelstar PLUS
- Entry of 'Field identifier'.

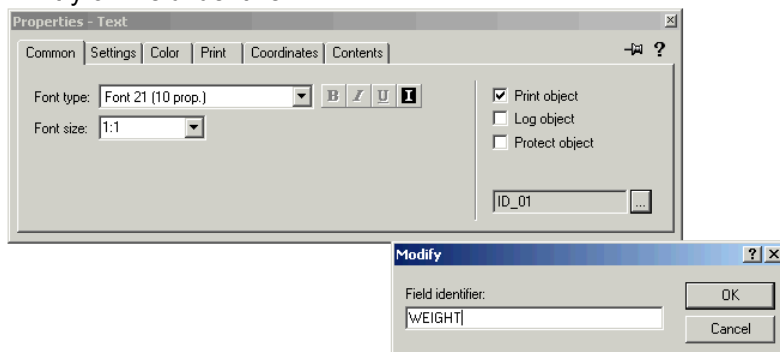

- Selection of option 'Transmit field identifier'.

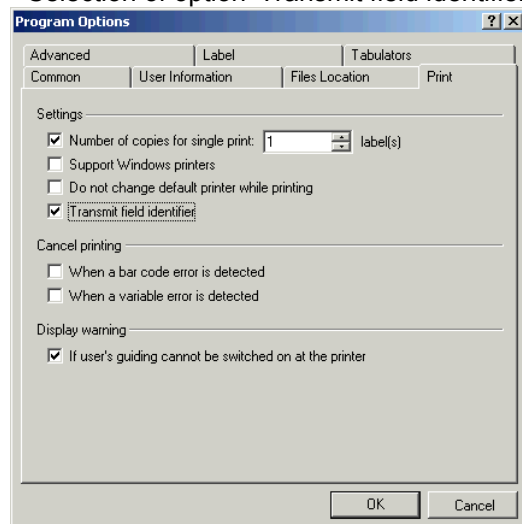

- b) Save label on memory card of printer.
- c) The external control loads first the saved label from memory card of printer with **(SOH)FMB---rF(ETB)**
See chapter 'Memory card'.
- d) With text set **(SOH)BV[NAME]...(ETB)** the contents of field is determined.
- e) With parameter set **(SOH)FBC---rS----- (ETB)** the print is started.
See chapter 'printing'.

Field selection by free definable field number

With the following described attribute it is possible to assign a free definable field number to a field. This field number does not have to be clear, i.e. several fields can have the same field number. In this way the same field contents can be assigned to different fields.

The following attribute identification is defined:

Attribute	Description
FN	free definable field number

After the field number was assigned with AC mask statement,

(SOH)AC[n]FN=nr(ETB)

n = field index

nr = free definable field number

it is possible to access to the field and/or the fields with the new BF text statement:

(SOH)BF[nr]text(ETB)

nr = field number

text = field contents

Example

// Assignment of field number for field 1 and field 2

(SOH)AM[1]1000;2500;0;4;2;7;400;400;0(ETB)

(SOH)AC[1]FN=100(ETB)

(SOH)AM[2]2000;2500;0;30;2;4000;9;3;0;1(ETB)

(SOH)AC[2]FN=100(ETB)

// Access to field 1 and field 2 by field number

(SOH)BF[100]1234567890(ETB)

Foreground and background

For following objects/fields the foreground and background can be specified explicitly:

- Bitmap text (only foreground)
- TrueDoc text (only foreground)
- Graphic from memory card (only foreground)
- Line (only foreground)
- Rectangle (only foreground)
- QR Code (only foreground)
- GS1 DataBar (RSS) (only foreground)
- CODABLOCK (only foreground)
- DataMatrix (only foreground)
- PDF417 (only foreground)
- CODABAR (only foreground)
- Code 128 (only foreground)
- Code 2/5 interleaved (only foreground)
- Post Leitcode (only foreground)
- Post Identcode (only foreground)
- ITF 14 (only foreground)
- Code 39 (only foreground)
- Code 39 extended (only foreground)
- Code 93 (only foreground)
- EAN ADD ON (only foreground)
- EAN 13 (only foreground)
- EAN 8 (only foreground)
- GS1-128 (only foreground)
- Pharmacode (only foreground)
- PZN Code (only foreground)
- UPC A (only foreground)
- UPC E (only foreground)

The following attribute identification is defined:

BGND	Background of field
FGND	Foreground of field

The following values can be assigned to the attributes:

0	black
1	white
2	inverted
3	transparent
4	standard

- black: The field contents is generated in black onto the label (previous standard).
- white: The field contents is generated in white onto the label.
- inverted: The field contents is generated inverted to the background onto the label.
- transparent: The field contents is generated transparent onto the label – no change of contents that is generated till then.

If the attribute for the background is set, this effects on all fields within this range, generated so far. With the selection of white or black the fields beneath are covered. If inverted is selected then they change their color.

The attribute value for the foreground always refers to the current background. If no attribute is explicitly set, all generated fields so far in this sector are regarded as background.

At the generation, always the first attribute for the background (if set) and then the attribute for the foreground (if set) is processed.

Example:

```
// Creation of field for bitmap text
(SOH)AM[1]2000;5000;0;1;0;21;2;2;50;7(ETB)
```

```
// Text field contents
(SOH)BM[2]Inverted text(ETB)
```

```
// Invert text field
(SOH)AC[2]BGND=3;FGND=2(ETB)
```

MASK SET

Text

AM[n]y;x;p;a;d;z;dy;dx;lp;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y coordinate in 1/100 mm
x	X coordinate in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 1 = Bitmap font 5 = Vector font autoscale* 2 = Bitmap font invers 6 = Vector font invers* 4 = Vektor font* 7 = Vector font autoscale invers*
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
z	character font for not proportional Bitmap fonts (1+2) 01 = FONT 01 0,8 x 1,1 mm 127 characters 02 = FONT 02 1,2 x 1,7 mm 255 characters 03 = FONT 03 1,8 x 2,6 mm 255 characters 04 = FONT 04 4,0 x 5,6 mm 127 characters 05 = FONT 05 1,8 x 3,2 mm - descender 255 characters 06 = FONT 06 1,5 x 2,9 mm 127 characters 07 = FONT 07 1,2 x 2,2 mm - descender 255 characters
	character font for proportional Bitmap fonts (1+2) 21 = FONT 21 (1,0; 13) 255 characters 22 = FONT 22 (1,8; 21) 255 characters 23 = FONT 23 (2,6; 31) 255 characters 24 = FONT 24 (5,6; 67) 255 characters 28 = FONT 28 (4,0; 48) 255 characters 29 = FONT 29 (0,8; 9) 255 characters
	character font for vector fonts (4-7)* 01 = Helvetica Bold 02 = Helvetica Bold italics 03 = Helvetica Roman 04 = Helvetica Roman italics 05 = Swiss Light 06 = Swiss Light italics 07 = Baskerville 08 = Baskerville italics 09 = Brush Script 10 = Brush Script italics 11 = Monospace 12 = Monospace italics
	extension in direction Y Bitmap fonts factor 0..9 Vecor fonts* character size in 1/100 mm Vector fonts Autoscale * field height
	extension in direction X Bitmap fonts factor 0-9 Vector fonts* character sign in 1/100 mm Vector fonts Autoscale* field width
	lp distance between single characters in 1/100 mm
	dp datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

* only Vario II 107/12

Standard code

AM[n;y;x;p;a;d;h;v1;v2;pz;z;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 30 = Code 39 31 = Code 2/5 interleaved 32 = EAN 8 33 = EAN 13 34 = UPC A 35 = UPC E 36 = CODABAR 37 = Code 128 38 = EAN ADD ON 39 = GS1-128 (EAN 128) 40 = Code 93 41 = PZN 42 = 2/5 Industrie 43 = Leitcode 44 = Identcode 46 = Code 39 extended 47 = Code 128 A 48 = Code 128 B 49 = Pharmacode
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
h	height of symbol in 1/100 mm
v1	relation 1; module width 'THICK'
v2	relation 2; module width 'THIN' res. SC factor
pz	check digit calculation 0 = no check digit calculation 1 = check digit calculation 4 = inverse - no check digit calculation 5 = inverse - check digit calculation
z	human readable line 0 = no human readable line 1 = with human readable line
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

ITF Code

AM[n]y;x;p;a;d;h;v1;v2;pz;z;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print - 1 = no print
a	identification for field type 31 = Code 2/5 interleaved
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
h	height of symbol in 1/100 mm
v1	relation 1; module width 'THICK'
v2	relation 2; module width 'THIN' res. SC factor
pz	check digit calculation 0 = no check digit calculation 1 = check digit calculation 4 = inverse - no check digit calculation 5 = inverse - check digit calculation
z	human readable line 0 = no human readable line 1 = with human readable line
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

In order to print the bearer bars of an ITF 14 barcode, the following additional properties for Code 2/5 interleaved must be set:

For this the following field properties are determined:

Property identifier	Description
BT	bearer bar type 0 = no bars 1 = above/below 2 = rectangle
BW	bearer bar width in 1/100 mm
QZ	quiet zone in 1/100 mm

Example

```
// BARCODE (1/100 mm)
(SOH)AM[1]4498;7076;0;31;2;3000;12;4;0;1;3(ETB)
(SOH)AC[1]BT=2;BW=150;QZ=600(ETB)
(SOH)BM[1]1234567890123(ETB)
```



2D bar codes

PDF417

AM[n;y;x;p;a;d;s;rw;rh;ec;z;dp;c;r	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 50 = PDF417
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
s	symbol size
rw	relation width
rh	relation height
ec	error correction level 0 - ECC Level = 0 1 - ECC Level = 2 2 - ECC Level = 6 3 - ECC Level = 14 4 - ECC Level = 30 5 - ECC Level = 62 6 - ECC Level = 126 7 - ECC Level = 254 8 - ECC Level = 510
z	style 0 = Standard 1 = Truncated 2 = Naked 3 = Bare
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom
c	number of columns 0 = automatic, 1-30
r	number of rows 0 = automatic, 3-90

MAXICODE

AM[n]y;x;p;a;d;0;sn;ns;m;0;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 51 = MAXICODE
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
0	dummy
sn	symbol number
ns	quantity of symbols
m	mode 2 = Structured Message (US Carrier) 3 = Structured Message (International Carrier) 4 = Default message
0	dummy
dp	datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

DataMatrix

AM[n;y;x;p;a;d;s;aw;ah;ec;f;dp	
A	identification for mask set
M	identification for phantom field
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print; 1 = no print
a	identification for field type 52 = DataMatrix
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
s	symbol size in 1/100 mm
aw	relation width
ah	relation height
ec	error correction 0 - ECC Type = 0 ECC Level = 0 Overhead = 0 % 1 - ECC Type = 2* ECC Level = 40 Overhead = 33 % 2 - ECC Type = 3 ECC Level = 50 Overhead = 25 % 3 - ECC Type = 6 ECC Level = 80 Overhead = 33 % 4 - ECC Type = 8 ECC Level = 100 Overhead = 50 % 5 - ECC Type = 9* ECC Level = 110 Overhead = 75 % 6 - ECC Type = 10* ECC Level = 120 Overhead = 50 % 7 - ECC Type = 11* ECC Level = 130 Overhead = 67 % 8 - ECC Type = 12 ECC Level = 140 Overhead = 75 % 9 - ECC Type = 26 ECC Level = 200 Overhead = 0 %
f	format ID 0 - Format ID = 11 (numeric, 2000 characters)* 1 - Format ID = 1 (numeric, 500 characters) 2 - Format ID = 2 (alphabetical, 500 characters) 3 - Format ID = 3 (alphabetical + pointers, 500 characters) 4 - Format ID = 4 (alphanumeric, 500 characters) 5 - Format ID = 5 (7 Bit, 500 characters) 6 - Format ID = 6 (8 Bit, 500 characters) 7 - Format ID = 7 (pre-programmed, 500 characters)* 8 - Format ID = 12 (alphabetical, 2000 characters) 9 - Format ID = 14 (alphanumeric, 2000 characters)
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

* not supported from printer

CODABLOCK F

AM[n]y;x;p;a;d;h;nc;nl;m;s;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 53 = CODABLOCK F
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
h	height of line in symbole
nc	quantity of characters/line
nl	quantity of lines
m	mode
s	module size
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

GS1 DataBar (RSS)

AM[n]y;x;p;a;d;s;m;k;t;0;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 54 = GS1 DataBar (RSS)
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
s	number of segments per line [2..22]
m	module width [1 ... 12]
k	spacing correction [0,1,2]
t	symbol type 1 = GS1 DataBar Omnidirectional (RSS-14) 2 = GS1 DataBar Truncated (RSS-14 Truncated) 3 = GS1 DataBar Stacked (RSS-14 Stacked) 4 = GS1 DataBar Stacked Omnidirectional (RSS-14 Stacked Omnidirectional) 5 = GS1 DataBar Limited (RSS Limited) 6 = GS1 DataBar Expanded (RSS Expanded)
z	not in use
dp	datapoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

QR Code

AM[n]y;x;p;a;d;mo;cs;ms;cw;ec;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 57 = QR Code
d	rotation 0 = 0° 1 = 90° 2 = 180° 3 = 270°
mo	code model 1 = code model 1 2 = code model 2
cs	character set N = numeric A = alphanumeric B = 8-bit Byte K = Kanji
ms	masking -1 = auto 0-7 = mask x 8 = no masking
cw	line width in 1/100 mm per module possible values: 0-800
ec	error correction (restoring capacity) L = 7% M = 15% Q = 25% H = 30%
dp	datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

Rectangle

AM[n]y;x;p;a;h;b;s;m;dp	
A	identification for mask set
M	identification for protocol number
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 10 = rectangle
h	height of rectangle in 1/100 mm
b	width of rectangle in 1/100 mm
s	line width in 1/100 mm
m	line style; 1 digit
dp	Datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

Line

AM[n]y;x;p;a;d;l;s;m;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 11 = line
d	rotation 0 = horizontal 1 = vertical
l	length in 1/100 mm
s	line width in 1/100 mm
m	line style, 1 digit
dp	datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

Internal graphic

AM[n]y;x;p;a;d;dx;dy;dp	
A	identification for mask set
M	identification for protocol version
n	field number
y	Y position in 1/100 mm
x	X position in 1/100 mm
p	identification for phantom field 0 = print 1 = no print
a	identification for field type 3 = internal graphic
d	rotation 0 = horizontal 1 = vertical
dx	extension in direction X
dy	extension in direction Y
dp	datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom

TEXT SET

BM[n]text	
B	identification for text set
M	identification for extended protocol
n	field number
text	data contents, text

BV[n]text	
B	identification for text set
V	identification for selection by field name
n	field name
text	data contents, text

BF[n]text	
B	identification for text set
F	identification for selection by free definable field number
n	field number
text	data contents, text

Examples

Mask statement [SOH]AM[1]2000;4000;0;1;0;2;1;1;0[ETB]

field number
y position 20 mm
x position 40 mm
no phantom field
bitmap font
position 0
font 2
extension in y direction 1
extension in x direction 1
no blank pixel

Text statement [SOH]BM[1]this is a test [ETB]

field number 1
text "this is a test"

text set with variable definition: [SOH]BM[125]=CN(0,0,3,1,1)000[ETB]

Example label

ASCII data	Identification
⊗AM[1]3600;4600;0;33;0;1500;0;4;1;1⊕ ^C _R ^L _F	mask set for bar code
⊗BM[1]444444444444⊕ ^C _R ^L _F	appropriate text set
⊗AM[2]600;4700;0;4;0;1;300;200;24⊕ ^C _R ^L _F	five mask sets vector font / proportional font
⊗AM[3]600;3100;0;4;0;1;400;300;24⊕ ^C _R ^L _F	
⊗AM[4]1100;4700;0;4;0;1;400;300;24⊕ ^C _R ^L _F	
⊗AM[5]1800;4700;0;4;0;1;300;200;24⊕ ^C _R ^L _F	
⊗AM[6]1900;3700;0;4;0;1;600;400;24⊕ ^C _R ^L _F	
⊗BM[2]Art.Nr. ⊕ ^C _R ^L _F	five appropriate text sets
⊗BM[3]44444⊕ ^C _R ^L _F	
⊗BM[4]Artikelbezeichnung⊕ ^C _R ^L _F	
⊗BM[5]DM⊕ ^C _R ^L _F	
⊗BM[6]99,-- ⊕ ^C _R ^L _F	
⊗FBA000r06000000⊕	number of lines
⊗FBBA00r00001000⊕	number of items
⊗FBC000r00000000⊕	start

: graphic data in PCX format
 ⊗: SOH (1_{hex} bzw 5E_{hex})
 ⊕: ETB (17_{hex} bzw. 5F_{hex})
^C: CarriageReturn (0D_{hex})
^L_R: LineFeed (0A_{hex})

GRAPHIC

General graphic format

This format is supported by all our printers but note that a 8 bit transmission is absolute necessary.

SOH	D	p	p	p	p	lb	lb	lb	b	b	b	gb.....	ETB
-----	---	---	---	---	---	----	----	----	---	---	---	---------	-----

			min.	max.
D	=	identification for graphic set		
p	=	pixel line from above	'0000'	'1900'
lb	=	1. byte from left	'000'	'100'
b	=	quantity of bytes	'1'	'100'
gb	=	graphic bytes		

Graphic byte:



1 graphic bit = 0,083 x 0,083 mm

Graphic in PCX format

It is possible to transfer graphic data as a PCX-file (e.g. PaintBrush) to the printer. With this type of data transfer the PCX-file is transferred in a compressed form. Hereby the RLE-procedure is used and therefore the graphic data were reduced by approx. 30 %. This means that the effective transferring time for 300 dpi printers is cut in halves.

To set the printer ready for receiving PCX-data the protocol has to be switched over and hereby the following command set will be defined:

SOH	A	X	n	n	n	y	y	y	y	y	y	x	x	x	x	x	x	m	dp	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	----	-----

n	Index of transferred graphic to printer internal maintenance at present not processed (000)																		
y	Y coordinate of graphic in 1/100 mm																		
x	X coordinate of graphic in 1/100 mm																		
m	Mode 0 = standard Mode 1 = transparency Mode 2 = inverse Mode 3 = inverse transparency - background is overwritten - background is maintained - background is overwritten - background is maintained																		
dp	Datumpoint 1 = left top 2 = centre top 3 = right top 4 = left centre 5 = centre centre 6 = right centre 7 = left bottom (default) 8 = centre bottom 9 = right bottom																		

- The grey fields show constant data whereas the others mark the mask set of the PCX-protocol.
- It is recommended to observe that directly after the final sign (ETB) no separator res. fill character such as $C_R^L F$ is indicated.
- The printer supports the following PCX versions: 5, 3, 2 and 0.
- It is necessary that the corresponding PCX-file is available as monochrome (black/white).
- The graphic has to be available in the original size as the printer is not able to change the size by itself.

Before print start, indicated by parameter set 'FBC', the definition of field number, lines and pieces has to be effected via the parameter sets (FBA res. FBB).

Example of PCX file

-*** PCX_GRAPHIC-INFO ***-	
⊗#0500001A0018AX0010015300100941⊕#####	
⊗AM[1]3600;4600;0;33;0;1500;0;4;1;1⊕ ^{C_R} _{L_F}	mask set for bar code
⊗BM[1]444444444444⊕ ^{C_R} _{L_F}	appropriate text set
⊗AM[2]600;4700;0;4;0;1;300;200;24⊕ ^{C_R} _{L_F} ⊗AM[3]600;3100;0;4;0;1;400;300;24⊕ ^{C_R} _{L_F} ⊗AM[4]1100;4700;0;4;0;1;400;300;24⊕ ^{C_R} _{L_F} ⊗AM[5]1800;4700;0;4;0;1;300;200;24⊕ ^{C_R} _{L_F} ⊗AM[6]1900;3700;0;4;0;1;600;400;24⊕ ^{C_R} _{L_F}	five mask set vector font / proportional font
⊗BM[2]Art.Nr. ⊕ ^{C_R} _{L_F} ⊗BM[3]44444⊕ ^{C_R} _{L_F} ⊗BM[4]Artikelbezeichnung⊕ ^{C_R} _{L_F} ⊗BM[5]DM⊕ ^{C_R} _{L_F} ⊗BM[6]99,-- ⊕ ^{C_R} _{L_F}	Five appropriate text sets
⊗FBA00r06000000⊕	set number of lines (FBA...)
⊗FBBA00r00001000⊕	set quantity (FBBA..)
⊗FBC000r00000000⊕	start print order (FBC...)

: graphic data in PCX format

⊗: SOH (1_{hex} bzw 5E_{hex})

⊕: ETB (17_{hex} bzw. 5F_{hex})

^{C_R}: CarriageReturn (0D_{hex})

^{L_F}: LineFeed (0A_{hex})

VARIABLES

Set structure

SOH	BM	[n]	=	v	v	(	p1	p2	p..	pn	)	t1	t2	t..	t70	ETB
-----	----	-----	---	---	---	---	----	----	-----	----	---	----	----	-----	-----	-----

The grey marked part corresponds to the variable definition. The text entered from t1 to t70 is added to the function result of variable.

= start of function

vv variable type
 SC link field
 CN counter
 CC extended counter
 CL date/time
 CU currency variable
 SH shift variable
 UG user guiding
 MD memory card data

(start of variable parameter block

p1...pn variable parameter

) end of variable parameter block

Note: In case you want to print a text which corresponds exactly to the variable definition then you have to place '!' before.

SOH	BM	[n]	!	=	v	v	(	p1	p2	p..	pn	)	t1	t2	t..	t70	ETB
-----	----	-----	---	---	---	---	---	----	----	-----	----	---	----	----	-----	-----	-----

Link field

SOH	BM	[n]	=	S	C	(	p1	;	p2	;	p..	;	pn	)	t1	t2	t..	t70	ETB
-----	----	-----	---	---	---	---	----	---	----	---	-----	---	----	---	----	----	-----	-----	-----

= SC identification of link field

p1...pn identification of link elements (field number or constant text)
 field number is entered without leading '0'
 constant text is included in " but these marks are not printed

Note: Reference fields can be constant text or variables but no link fields.

Example: = SC (1; 2; 3) print: field1field2field3
 = SC (1;"constant"; 2) print: field1constantfield2

Counter

SOH	BM	[n]	=	C	N	(	t	;	m	;	c	;	+/-	s	;	i	;	h	;	r	)	t1	t2	t..	t70	ETB
-----	----	-----	---	---	---	---	---	---	---	---	---	---	-----	---	---	---	---	---	---	---	---	----	----	-----	-----	-----

= CN identification counter

t type of counter
 0 numerical
 1 letters only
 2...36 radix, base of the counter

m function mode of counter
 0 standard
 1 return to start value
 2 enter the start value at the beginning of printing
 (default = existing start value)
 3 enter the start value at the beginning of printing
 (default = last final number)
 4 reset start value at cycle end
 (only for DPM IIIi)
 5 reset start value by I/O signal
 6 time-controlled resetting
 7 time-controlled resetting with input of initial value
 (default = last final value)

c digit where the numbering starts counting

+/- direction
 + adding
 - subtracting

s step width

i update interval
 (number of labels with identical number)

h time by which the counter is reset (function mode 6 and 7) in format 'HH:MM'
 e.g. 00:00 = reset counter at 0:00
 (optional, only for function mode 6 and 7)

r reset value
 (optional, only for function mode 6 and 7; default = text and/or initial value)

Limitation:

The time-controlled resetting of counter variable is only effected in case of an active print order. If a print order is cancelled before the specified time and afterwards again restarted then no resetting of counter value is effected.

t1, t2, ... text res. start value of counter

Example:

Entry: = CN (10;7;4;+1;1;06:00;0001)1234

The enquiry for the initial value is effected at print start and at 6:00 the counter variable is reset to value 0001.

Extended counter

SOH	BM	[n]	=	C	C	(	+/-	s	;	i	;	m	;	z	;	n	;	x	)	t	ETB
-----	----	-----	---	---	---	---	-----	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

= CC identification of numeric counter

+/- direction

+ counter adding

- counter subtracting

s step width

i update interval
(number of labels with identical number)

m function mode of counter

0 standard

1 return to start value

2 enter the start value at the beginning of printing
(default = existing start value)

3 enter the start value at the beginning of printing
(default = last final number)

4 reset start value at cycle end
(only for DPM IIIi)

5 set min. / max. value

6 set start value

7 print end

z leading zeros

0 no leading zeros

1 printout with leading zeros

n minimum value (max. -999999999)

x maximum value (max. 999999999)

t start value

(the number of digits determines the format for the printout with leading zeros
(max. 999999999))

Example:

Entry: = CC (+1;2;5;0;1,999)0050

Print: 50, 51,...999, 1, 2, ...

Date / Time

SOH	BM	[n]	=	C	L	(	m	;	d	;	i	;	n	;	c	;	mo	;	pd	;	pm	;	md	;	mm	;	rw	;	ws	)	t1	t..	t70	ETB
-----	----	-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	----	---	----	---	----	---	----	---	----	---	----	---	----	---	----	-----	-----	-----

= CL identification date/time
 m month offset to the actual date
 d day offset to the actual date
 i update interval (0 = at the beginning of a print order, 1 = each label)
 n minute offset of the actual time
 c correction month overflow (0 = change to the next month, 1 = remain in current month)

Optional parameters for BBE date

mo entry mode 0: standard; display current date of real time clock
 1: display calculated date, modification possible
 2: display calculated date, no modification possible
 pd max. positive correction days
 pm max. positive correction months
 md max. negative correction days
 mm max. negative correction months

Optional parameters for rounded date

rw rounded weekday: 1 = Sunday ... 7 = Saturday; 0 = no rounding
 ws start of week, format: "D-HH:MM", e.g. 1-00:00 = Sunday, 0:00 Uhr

Examples:

Actual date as per Real Time Clock: 25.02.08

Entry:	= CL (0;0;0)<DD.MO.YY>	Print:	25.02.08
Entry:	= CL (1;1;0)<DD.MO.YY>	Print:	26.03.08

Example for BBE date

Entry: =CL (0;0;0;0;0;1;3;2;3;2)<DD.MO.YY> At print start the calculated date is displayed at the printer and can be modified (+/- 3 days and +/- 2 months):

Display:

ID_01	DD:MO:YY
	25:02:08

Example for rounded date

The beginning of the week is on Sunday at 00:00. The date of Monday should be printed the whole week.

Entry: =CL (0;0;0;0;0;0;0;0;0;0;2;1-00:00)<DD.MO.YY>

Current date	Rounded date
23.02.2008 23:59:59	18.02.2008
24.02.2008 00:00:00	25.02.2008
25.02.2008	25.02.2008
01.03.2008 23:59:59	25.02.2008
02.03.2008 00:00:00	03.03.2008

Format identifier

Standard format	
HH	Hours 2-digit (24 hours)
HE	Hours 2-digit (12 hours)
MI	Minutes 2-digit
SS	Seconds 2-digit
AM	AM/PM output
DD	Day 2-digit
MO	Month 2-digit
YYYY	Year 4-digit
YY	Year 2-digit
Y	Year 1-digit
WW	Calendar week
DW	Day of week (Sunday = 0)
DW1	Day of week (Sunday = 1)
DwX	Day of week For x it is possible to enter any ASCII character from which is counted continuously
DOWxxxxxx	Day of week - variable For x it is possible to enter any ASCII character The first ,x' denominates Sunday, the next denominates Monday and so on until Saturday For each weekday a character must be created
DOY	Day of year 3-digit (First January = 1)
DY	Day of year 3-digit (First January = 0)
Examples	
DD.MO.YY	10.09.06
MO/DD/YYYY	09/10/2006
YY-MO-DD	06-09-10
YYMODD	060910

The format identifier 'HE' and 'AM'/'am'/'Am' are supplemented. Therefore the output of hours in 12-hours mode is possible. By the additional output of format identifier 'AM' the output of time in american/english format is possible.

Examples:

=CL(0;0;0;0)<HH:MI:SS>	->	15:30:00
=CL(0;0;0;0)<HE:MI:SS>	->	03:30:00
=CL(0;0;0;0)<HE:MI:SS AM>	->	03:30:00 PM
=CL(0;0;0;0)<HE:MI:SS am>	->	03:30:00 pm
=CL(0;0;0;0)<HE:MI:SS Am>	->	03:30:00 p.m.

By separating the output of time and AM/PM output in 2 text fields, also the following output format is possible:

03:30:00 pm

Extended format	
XMO	Name of month short
XSO	Name of month long
XSD	Weekday short
XLD	Weekday long
For X you can enter the country identification of desired language	
C = Canadian D = Danish E = English F = French G = German I = Italian N = Dutch O = Norwegian S = Spanish U = Finnish W = Swedish	
Examples:	
DD.EMO.YY	10.SEP.06
DD.ESO YYYY	10. September 2006
ELD,DD.GMO.YY	Sunday, 10. SEP.06
ESD,DD.MO.YY	DO, 10.09.06

Extended format - XMO

C	JA	FE	MR	AL	MA	JN	JL	AU	SE	OC	NO	DE
D	JAN	FEB	MAR	APR	MAJ	JUN	JUL	AUG	SEP	OKT	NOV	DEC
E	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
F	JAN	FEV	MAR	AVR	MAI	JUIN	JUIL	AOU	SEP	OCT	NOV	DEC
G	JAN	FEB	MRZ	APR	MAI	JUN	JUL	AUG	SEP	OKT	NOV	DEZ
I	GEN	FEB	MAR	APR	MAG	GIU	LUG	AGO	SET	OTT	NOV	DIC
N	JAN	FEB	MRT	APR	MEI	JUN	JUL	AUG	SEP	OKT	NOV	DEC
O	JAN	FEB	MAR	APR	MAI	JUN	JUL	AUG	SEP	OKT	NOV	DES
S	ENE	FEB	MAR	ABR	MAY	JUN	JUL	AGO	SEP	OCT	NOV	DIC
U	TAM	HEL	MAA	HUH	TOU	KES	HEI	ELO	SYU	LOK	MAR	JOU
W	JAN	FEB	MAR	APR	MAJ	JUN	JUL	AUG	SEP	OKT	NOV	DEC

Extended format - XSO

C	January	February	March	April	May	June
D	Januar	Februar	Marts	April	Maj	Juni
E	January	February	March	April	May	June
F	Janvier	Février	Mars	Avril	Mai	Juin
G	Januar	Februar	Maerz	April	Mai	Juni
I	Gennaio	Febbraio	Marzo	Aprile	Maggio	Giugno
N	Januari	Februari	Maart	April	Mei	Juni
O	Januar	Februar	Mars	April	Mai	Juni
S	Enero	Febrero	Marzo	Abril	Mayo	Junio
U	Tammikuu	Helmikuu	Maaliskuu	Huhtikuu	Toukokuu	Kesaekuu
W	Januari	Februari	Mars	April	Maj	Juni

C	July	August	September	October	November	December
D	Juli	August	September	Oktober	November	December
E	July	August	September	October	November	December
F	Juillet	Août	Septembre	Octobre	Novembre	Décembre
G	Juli	August	September	Oktober	November	Dezember
I	Luglio	Agosto	Settembre	Ottobre	Novembre	Dicembre
N	Juli	Augustus	September	Oktober	November	December
O	Juli	August	September	Oktober	November	Desember
S	Julio	Agosto	Septiembre	Octubre	Noviembre	Diciembre
U	Heinaekuu	Elokuu	Syyskuu	Lokakuu	Marraksuu	Joulukuu
W	Juli	Augusti	September	Oktober	November	December

Extended format - XSD

C	SUN	MON	TUE	WED	THU	FRI	SAT
D	SO	MA	TI	ON	TO	FR	LO
E	SUN	MON	TUE	WED	THU	FRI	SAT
F	DIM	LUN	MAR	MER	JEU	VEN	SAM
G	SO	MO	DI	MI	DO	FR	SA
I	DOM	LUN	MAR	MER	GIO	VEN	SAB
N	ZO	MA	DI	WO	DO	VR	ZA
O	SO	MA	TI	ON	TO	FR	LO
S	DOM	LUN	MAR	MIE	JUE	VIE	SAB
U	SU	MA	TI	KE	TO	PE	LA
W	SO	LA	TI	ON	TO	FR	LO

Extended format - XLD

C	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
D	Søndag	Mandag	Tirsdag	Onsdag	Torsdag	Fredag	Lørdag
E	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
F	Dimanche	Lundi	Mardi	Mercredi	Jeudi	Vendredi	Samedi
G	Sonntag	Montag	Dienstag	Mittwoch	Donnerstag	Freitag	Samstag
I	Domenica	Lunedì	Martedì	Mercoledì	Giovedì	Venerdì	Sabato
N	Zondag	Maandag	Dinsdag	Woensdag	Donderdag	Vrijdag	Zaterdag
O	Søndag	Mandag	Tirsdag	Onsdag	Torsdag	Fredag	Lørdag
S	Domingo	Lunes	Martes	Miércoles	Jueves	Viernes	Sábado
U	Sunnuntai	Maanantai	Tiistai	Keski-viikko	Torstai	Perjantai	Lauantai
W	Søndag	Måndag	Tisdag	Onsdag	Torsdag	Fredag	Lördag

Currency variable

SOH	B	n	n	=	C	U	(	a	;	b	;	c	;	d	;	e	;	f	;	g	)	t1	t2	t..	t70	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	----	----	-----	-----	-----

= CU Signification of variable Euro

a ANSI-Code of thousand separator as decimal figure

b ANSI-Code of comma separator as decimal figure

c Quantity of numbers after the comma as decimal figure

d Operand A Before the processing the variable Euro calculates the term

e Operand B $\frac{A \times B}{C}$

f Operand C

g Rounding format

t1, t2, ... Format string, is indicated by "< >"

Example:

In case the contents of field 20 has to be converted from USD into EUR the definition of variable for the user defined format is as follows:

B01 "=CU(46;44;2;20;"1,0";"0,68861";"0,01")Result: <>Euro"

B20 1.250,44 USD

Printout: 1.250,44 USD
 Result: 1.815,89 Euro *

* 1 USD = 0,68861 Euro (11.01.2010)

User guiding


SOH	BM	[n]	=	U	G	(	c	;	t	;	m	;	ap	;	ae	;	sp	)	t1	t2	t..	t70	ETB
-----	----	-----	---	---	---	---	---	---	---	---	---	---	----	---	----	---	----	---	----	----	-----	-----	-----

= UG	identification user guiding
c	start position for the entry
t	type of entry
0	numerical
1	alphanumeric
m	mode of entry
0	do not jump over special characters
1	jump over special characters
ap	alignment print
0	aligned to the right side
ae	alignment entry
0	aligned to the right
sp	prompt text for the variable, max. 24 characters The entry has to be included in ".

Example:

Entry: = UG (1;0;0;0;0;"Enter article no")<000000>

Display:



```
Enter article no
000000
```

Memory card data

SOH	BM	[n]	=	M	D	(	FN="filename"	;	SE='x'	;	CH=x	;	SC="x"	;	SF="x"	;	RC="x"	)	ETB
-----	----	-----	---	---	---	---	---------------	---	--------	---	------	---	--------	---	--------	---	--------	---	-----

= MD identification of memory card data

FN file name of table onto memory card with CSV data

SE Separator sign (default = ';')

CH column name in the first line (0 = no, 1 = yes)

SC name and/or number of column that should be referenced

SF field name and/or field index of field onto the label, which contains the searched data

RC name and/or number of column, which contains the data to be printed

Remark: If in parameter SF a field name is indicated, this must have been defined for the appropriate field by an AC attribute statement!

Example:


AC[1]NAME="FCODE"

BM[2]=MD(FN="a:\daten.csv";SE=";";CH=1;SC="Farbcode";SF="FCODE";RC="IC-Nummer")

Field 1 Printout field Feld 2

00001 121478242

23252 784587448

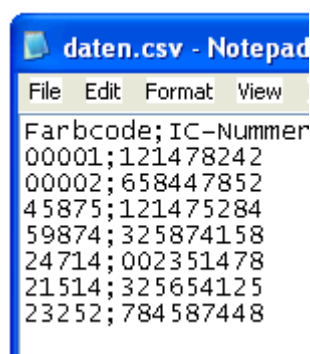

GS1-128 (EAN 128) Parser

Note: By means of this variable type, the content of an application identifier in a GS1-128 bar code can be determined.

SOH	BM	[n]	=	A	I	(	p	;	Ai	)	ETB
-----	----	-----	---	---	---	---	---	---	----	---	-----

= AI identification of GS1-128 parser

p identification of the link element (field number)

Ai application identifier

Example: Field 1 ="00123456789012345675"

GS1-128 with AI00

= AI (1;"00")

Printout: 123456789012345675

EPC calculation (Electronic Product Code)*

SOH	BM	[n]	=	E	P	C	(	M	;	L	;	F	;	P	;	N1	;	{N2}	)	ETB
-----	----	-----	---	---	---	---	---	---	---	---	---	---	---	---	---	----	---	------	---	-----

= EPC identification of EPC calculationKennung EPC Berechnung

M coding method

L length of manufacturer number (company prefix)

F filter value

P verification of check digit

N1 identification of link element (field number)

N2 identification of link element (field number) - optional

Note: For more information, visit the following web sites: www.epcglobalinc.org or www.gs1.org

Parameter	Value range		
M	0 = Coding method SSCC96		3 = Coding method GRAI96
	1 = Coding method SGTIN96		4 = Coding method GIAI96
	2 = Coding method SGLN96		
L	6...12		
F	Coding	Filter value	Binary value
	SSCC96	All Others	000
		Undefined	001
		Logistical / Shipping Unit	010
	SGTIN96	All Others	000
		Retail Consumer Trade Item	001
		Standard Trade Item Grouping	010
		Single Shipping / Consumer Trade Item	011
	SGLN	All Others	000
		Physical Location	001
	GRAI	All Others	000
	GIAI	All Others	000
P	0 = no verification; 1 = verification of check digit		
N1	any		
N2	any		

Example 1: Field 1 = "00123456789012345675"

Field 2 = AI (1;"00")

Field 3 = EPC(0;12;0;1;2)

GS1-128 with AI00

Printout: 123456789012345675

Printout: 3100DA7557D32C38E7000000

The EPC is calculated with the content of Field 2. The coding method SSCC96 is used. In Field 2 a valid NVE must be represented (18-digit, correct check digit).

Example 2: Field 1 = "4141234567890128254123"

Field 2 = AI (1;"414")

Field 3 = AI (1;"254")

Field 4 = EPC(2;10;0;0;2;3)

GS1-128 with AI00, AI254

Printout: 1234567890128

Printout: 123

Printout: 3208499602D218000000007B

The EPC is calculated with the content of Field 2 and Field 3. The coding method SGLN96 is used. In Field 2 a valid ILN must be represented (13-digit). In the example, Field 3 contains an optional serial number. No verification of check digit of ILN (8) is effected.

* only when using option RFID

PARAMETER SETS

Label parameter

Set label photocell type

SOH	F	C	D	E	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – transmission photocell normal

N = 1 – reflexion photocell normal

N = 2 – transmission photocell inverse

N = 3 – reflexion photocell inverse

Enquire label photocell type

SOH	F	C	D	E	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label type

SOH	F	C	D	A	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – selection of adhesive labels (automatical measure process)

N = 1 – selection of continuous labels

Enquire label type

SOH	F	C	D	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Measure label

In case of loading a new label roll it is possible to start measuring by this command.

SOH	F	C	B	-	-	-	r	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

The current label and gap length in the printer can be send to the Host computer:

SOH	F	C	B	-	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

After this command the printer sends the following answer:

Answer

SOH	A	E	E	E	E	S	S	S	S	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

EEEE indicates the label length in mm (ASCII)

SSSS indicates the gap length in mm (ASCII)

Set measure label automatically after switching on

SOH	F	C	C	A	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 - Off

N = 1 - On

Enquire measure label automatically after switching on

SOH	F	C	C	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label length in 1/100 mm

SOH	F	C	C	L	-	-	r	N	N	N	N	N	N	N	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: value of label length in 1/100 mm, 7 digit ASCII number

Enquire label length in 1/100 mm

SOH	F	C	C	L	-	-	w	N	N	N	N	N	N	N	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	N	N	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set gap length in 1/100 mm

SOH	F	C	C	M	-	-	r	M	M	M	M	M	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

M: value of gap length in 1/100 mm, 5 digit ASCII number

Enquire gap length in 1/100 mm abfragen

SOH	F	C	C	M	-	-	w	M	M	M	M	M	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	M	M	M	M	M	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label width in 1/100 mm

SOH	F	C	C	O	-	-	r	N	N	N	N	N	N	N	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: indication of label width in 1/100 mm, 7 digit ASCII number

Enquire label width in 1/100 mm

SOH	F	C	C	O	-	-	w	P	P	P	P	P	P	P	P	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	N	N	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label error length

SOH	F	C	D	G	A	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNN = Indication of label error length in mm (1-9999)

Enquire label error length

SOH	F	C	D	G	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label synchronisation

SOH	F	C	D	G	B	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – Off

N = 1 – On

Enquire label synchronisation

SOH	F	C	D	G	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set number of columns

SOH	F	C	C	H	A	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = number of columns (1..9)

Enquire number of columns

SOH	F	C	C	H	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set column width

SOH	F	C	C	H	B	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: indication of column width in 1/10 mm (0..999)

Enquire column width

SOH	F	C	C	H	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label alignment

SOH	F	C	C	J	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: left

N = 1: centre

N = 2: right

Enquire label alignment

SOH	F	C	C	J	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set contrast

SOH	F	C	A	B	-	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: Indication of contrast in % (010...200)

It is necessary to transmit a 3 digit ASCII number

Enquire contrast

SOH	F	C	A	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set flip label

SOH	F	C	D	O	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – flip label Off

N = 1 – flip label On

Enquire flip label

SOH	F	C	D	O	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label rotation

SOH	F	C	D	N	-	-	r	X	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

X = 0 – rotate label Off

X = 1 – rotate label On

Enquire label rotation

SOH	F	C	D	N	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	X	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set operating mode flip/rotate label

SOH	F	C	D	S	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – flip/rotate label at the centre point of label

N = 1 – flip/rotate label at the centre point of printhead

Enquire operating mode flip/rotate label

SOH	F	C	D	S	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set material

SOH	F	C	D	N	C	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNN: indication of material

0 = Type 1

1 = Type 2*

2 = Type 3*

3 = Type 4*

4 = Type 5*

5 = Type 6*

6 = Type 7*

7 = Type 8*

Enquire material

SOH	F	C	D	N	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set scan position

SOH	F	C	D	E	A	-	r	N	N	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NN = Indication of set label length in % (01-99)

This value depends on the label length.

Enquire scan position

SOH	F	C	D	E	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

* only Vario II 107/12

Label photocell

Enquire minimal measured level at label photocell

SOH	F	C	M	A	A	-	w	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value of measured level, 3 digit ASCII number in 1/100 V

Enquire maximum measured level at label photocell

SOH	F	C	M	A	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value of measured level, 3 digit ASCII number in 1/100 V

Set switching threshold of label photocell

SOH	F	C	M	A	C	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value of switching threshold, 3 digit ASCII number in 1/100 V

This value is automatically calculated at measuring process at printer $(\min + \frac{\max - \min}{3})$

Enquire switching threshold

SOH	F	C	M	A	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value at measured switching threshold, 3 digit ASCII number in 1/100 V

Enquire current value at transfer ribbon photocell

SOH	F	C	M	B	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – no transfer ribbon inserted

N = 1 – transfer ribbon inserted

Enquire current value at set label photocell

SOH	F	C	M	B	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value at label photocell, 3 digit ASCII number in 1/100 V

Dispensing photocell

Enquire condition of dispensing photocell

SOH	F	C	M	B	E	A	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – no label is at photocell

N = 1 – label is at photocell

The set switching threshold of dispensing photocell is taken into consideration.

Device settings

Set print speed

SOH	F	C	A	A	-	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: Indication of print speed in mm/s (050 ... 200)

It is necessary to transmit a 3 digit ASCII number

Enquire speed

SOH	F	C	A	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set transfer ribbon control On/Off

SOH	F	C	D	B	-	-	r	N	M	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 1 – transfer ribbon control Off

M = 0 – weak sensibility

N = 0 – transfer ribbon control On

M = 1 – strong sensibility

Enquire transfer ribbon control On/Off

SOH	F	C	D	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	M	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set field handling

SOH	F	C	D	K	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – field handling Off

N = 1 – graphic received

N = 2 – delete graphic

Enquire field handling

SOH	F	C	D	K	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set printer language

SOH	F	C	D	I	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – German

N = 6 – Portuguese

N = 1 – English

N = 7 – Netherlands

N = 2 – French

N = 8 – Italian

N = 3 – Spanish

N = 9 – Danish

Enquire printer language

SOH	F	C	D	I	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set external printer parameter

SOH	F	C	C	P	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: 0 = parameter settings by interface are not taken into consideration
 1 = parameter settings by interface are processed

Enquire external printer parameter

SOH	F	C	C	P	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set Codepage

SOH	F	C	C	N	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 - ANSI
 N = 1 - Codepage 437 (english)
 N = 2 - Codepage 850
 N = 3 - GEM German
 N = 4 - GEM English
 N = 5 - GEM French
 N = 6 - GEM Swedish
 N = 7 - GEM Danish
 N = 8 - Codepage 437 (Greek)
 N = 9 - Codepage 852 (Eastern European)
 N = 10 - Codepage 857 (Turkish)

Enquire Codepage

SOH	F	C	C	N	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set user guiding

SOH	F	C	D	U	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 - Off, no entries are possible but pre-set values are printed
 N = 1 - On, the user has to enter a value for each variable or to confirm the pre-set values by pressing the enter key. This default value is set each time the printer is switched on
 N = 2 - Auto, the entries for a label are repeated after each print and the last entered values are the new pre-set values

Enquire user guiding

SOH	F	C	D	U	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set keyboard layout

SOH	F	C	C	K	-	-	R	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – German keyboard

N = 1 – English keyboard

N = 2 – French keyboard

N = 3 – Greek keyboard

N = 4 – Spanish keyboard

N = 5 – Swedish keyboard

N = 6 – Czech keyboard

Enquire keyboard layout

SOH	F	C	C	K	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set buzzer On/Off

SOH	F	C	C	B	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – Buzzer Off

N = '1' – Buzzer On

Enquire buzzer On/Off

SOH	F	C	C	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set brightness of display

SOH	F	C	C	B	A	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = value range of display brightness 0 - 7

Enquire brightness of display

SOH	F	C	C	B	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set hotstart On/Off

SOH	F	C	D	W	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – hotstart Off

N = '1' – hotstart On

Enquire hotstart On/Off

SOH	F	C	D	W	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set autoload

SOH	F	C	D	X	-	-	R	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – Off

N = 1 – On

Enquire autoload

SOH	F	C	D	X	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set default label On/Off

SOH	F	C	M	K	E	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – Off: Print start without label definition signals error.

N = '1' – On: Default label is printed without label definition.

Default: Off

Enquire default label On/Off

SOH	F	C	M	K	E	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set operating mode backfeed

SOH	F	C	M	R	A	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – standard

N = '1' – automatic

N = '2' – no backfeed

N = '3' – optimised

Enquire operating mode backfeed

SOH	F	C	M	R	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set backfeed delay

SOH	F	C	M	R	B	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: indication of delay time, 3 digit ASCII number in 1/100s

Enquire backfeed delay

SOH	F	C	M	R	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set label change confirmation

SOH	F	C	S	D	F	C	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – Confirmation Off

N = '1' – Confirmation On

Enquire label change confirmation

SOH	F	C	S	D	F	C	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Interface

You can set the parameter of the serial interface by the following commands but you have to note that after sending one of the commands also the host computer changes the corresponding parameter of its interface to allow further communications Host computer – printer.

For all interface commands the interface is fixed with x. Allowed are the following values:

x = 1 $\Rightarrow$ COM 1

x = 2 $\Rightarrow$ COM 2

In all other cases automatically the first serial interface is addressed.

In the answers the addressed interface is also returned.

Set all interface parameter

SOH	F	C	F	F	x	-	r	m	;	b	;	p	;	d	;	s	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

m = mode (0 = Off, 1 = On, 2 = On, without error message)

b = Baudrate (2400, 4800, 9600, 19200, 38400, 57600)

p = parity (n = no parity, e = even parity, o = odd parity)

d = number of data bits (7, 8)

s = number of stop bits (1, 2)

Enquire all interface parameter

SOH	F	C	F	F	x	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	x	;	m	;	b	;	p	;	d	;	s	;	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Example: activate interface COM1 and set 9600 Baud, no parity, 8 data bits, 2 stop bits
[SOH]FCFF1-r1;9600;n;8;2[ETB]

Interface protocol

There are two different interface protocols available. Usually SOH = 01_{Hex} and ETB = 17_{Hex}. However there are host computers (e.g. AS/400), which can not work with these characters. Therefore you can switch SOH = 5E_{Hex} and ETB = 5F_{Hex}. The host computer has to change the corresponding parameter as well.

Set SOH and ETB

SOH	F	C	G	C	-	-	r	N	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 - SOH = 01_{Hex}, ETB = 17_{Hex}

N = 1 - SOH = 5E_{Hex}, ETB = 5F_{Hex}

Enquire SOH and ETB

SOH	F	C	G	C	-	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Data memory

Set data memory

SOH	F	C	G	D	-	-	r	M	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

M = 0 Off, after receiving FBCA0r or FBDA0r the interface is locked until the end of the print order, i.e. you cannot write more data in the receiving buffer.

M = 1 Standard, after starting a print order no data of the receiving buffer are processed but it is possible to write more data in the receiving buffer until it is full.

M = 2 Extended, after starting a print order it is possible to write more data in the receiving buffer. These data is processed during the print and the next label is prepared.

Enquire data memory

SOH	F	C	G	D	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	M	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set reaction to unknown interrogative set

SOH	F	C	G	E	A	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N – Indication of value between 0 and 3

Enquire reaction to unknown interrogative set

SOH	F	C	G	E	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set port transmission

SOH	F	C	G	F	-	-	r	S	T	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

S - Source (indication of source port)

T - Target (indication of target source)

Port numbers: 1 - 6

Port number:

- 1 = COM1
- 2 = COM2 (depending on printer)
- 3 = LPT
- 4 = USB
- 5 = TCP (option)
- 6 = UDP (option)

Enquire port transmission

SOH	F	C	G	F	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	"	S1-T1	;	S2-T2	;	...	ID	:	p	p	p	p	p	p	p	"	ETB
-----	---	---	-------	---	-------	---	-----	----	---	---	---	---	---	---	---	---	---	-----

Offset values

Set zero point displacement (Offset 2)

SOH	F	C	C	D	-	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (+ or -)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire zero point displacement (Offset 2)

SOH	F	C	C	D	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set displacement in direction X (Offset 3)

SOH	F	C	C	E	-	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (+ or -)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire displacement in direction X (Offset 3)

SOH	F	C	C	E	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set tear off (Offset 4)

SOH	F	C	C	G	-	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire tear off (Offset 4)

SOH	F	C	C	G	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set cutter offset

SOH	F	C	S	C	A	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire cutter offset

SOH	F	C	S	C	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set dispenser offset

SOH	F	C	S	D	A	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire dispenser offset

SOH	F	C	S	D	A	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Service functions

Set Online / Offline

SOH	F	C	M	K	C	-	r	M	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

M = 0 – Online/Offline Off

M = 1 – Online/Offline On

Enquire Online/Offline

SOH	F	C	M	K	C	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	M	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

After changing by interface the display is automatically new initialised (by activated online/offline changing to online indication).

Set reprint action

SOH	F	C	M	K	D	-	r	N	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire reprint action

SOH	F	C	M	K	D	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: Reprint complete

N = 1: Reprint is blank

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set winder output

SOH	F	C	M	P	-	-	r	N	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: Off

N = 1: On

Enquire winder output

SOH	F	C	M	P	-	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire condition of printhead lockbar

SOH	F	C	M	C	A	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: lockbar open

N = 1: lockbar closed

Enquire printhead temperature

SOH	F	C	M	C	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answet

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value of printhead temperature, 3 digit ASCII number in degree

Set transfer ribbon prior warning

SOH	F	C	M	L	A	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: Off

N = 1: On

Enquire transfer ribbon prior warning

SOH	F	C	M	L	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set diameter for transfer ribbon prior warning

SOH	F	C	M	L	B	-	r	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN = 030 ... 090 diameter in mm

Enquire diameter for transfer ribbon prior warning

SOH	F	C	M	L	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Readout the current transfer ribbon diameter

SOH	F	C	M	L	C	-	w	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set reduced print speed (transfer ribbon prior warning)

SOH	F	C	M	L	D	-	r	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = -: not reduce speed

N = 0: stop printer with transfer ribbon error when reaching the warning diameter.

N = $V_{\min}$... $V_{\max}$: reduced print speed (depending on printer type)

Enquire reduced print speed (transfer ribbon prior warning)

SOH	F	C	M	L	D	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set printhead resistance

SOH	F	C	M	G	-	-	r	N	N	N	N	N	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNNN = Indication of resistance value in Ohm.

Enquire printhead resistance

SOH	F	C	M	G	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Mileage (kilometre) counter

It is only possible to enquire the kilometre values of printer and printhead by interface and not to set them to 0.

Enquire printer's mileage

SOH	F	C	H	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	N	N	N	N	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire printhead's mileage

SOH	F	C	H	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	N	N	N	N	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNNNNNN = Indication of mileage of printer res. printhead in meters (e.g. '00000123' = 123 m)

Date & Time

Set date

SOH	F	C	I	A	-	-	r	D	D	M	O	Y	Y	D	W	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

DD = day of month

MO = month

YY = year

DW = day of week ('00' = Sunday)

Enquire date

SOH	F	C	I	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	D	D	M	O	Y	Y	D	W	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set time

SOH	F	C	I	B	-	-	r	H	H	M	I	S	S	A	M	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

HH = hours

MI = minutes

SS = seconds

AM = mode ('am' = 12 hours mode AM, 'pm' = 12 hours mode PM, '—' = 24 hours mode)

Enquire time

SOH	F	C	I	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	H	H	M	I	S	S	A	M	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Automatically adjust clock for daylight saving changes

Because of the fact that there is no world-wide regulation if and when a changing of time between summer and wintertime (normal time) in the individual countries takes place, we distinguish between the following four formats for the definition for beginning and end of summertime.

F 0:	european format start of summertime = last Sunday in March end of summertime = last Sunday in October W: week (1 = first, ..., 5 = last) WD: day of week (0 = Sunday, ..., 6 = Saturday) MM: month (01 = January, ..., 12 = December)
F 1:	fix date with indication of year DD: day MM: month (01 = January, ..., 12 = December) YY: year
F 2:	fix date without indication of year DD: day MM: month (01 = January, ..., 12 = December)
F 3:	week day after day in month WD: day of week (0 = Sunday, ..., 6 = Saturday) DD: after day (only the first day is taken into consideration) MM: month (01 = January, ..., 12 = December)

Set automatically adjust clock for daylight saving changes

SOH	F	C	I	G	-	-	r	N	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire automatically adjust clock for daylight saving changes

SOH	F	C	I	G	-	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – Automatically adjust clock for daylight saving changes Off

N = 1 – Automatically adjust clock for daylight saving changes On

Set beginning of summertime

F 0: SOH F C I H - - r F W ; WD ; M M ; H H ; M M ETB

F 1: SOH F C I H - - r F D D ; M M ; Y Y ; H H ; M M ETB

F 2: SOH F C I H - - r F D D ; M M ; H H ; M M ETB

F 3: SOH F C I H - - r F WD ; D D ; M M ; H H ; M M ETB

Enquire beginning of summertime

SOH F C I H - - w p p p p p p p p ETB

Answer

SOH A F W W D M M p p p p p p p p ETB

The answer depends on each set format.

Set end of summertime

F 0: SOH F C I I - - r F W ; WD ; M M ; H H ; M M ETB

F 1: SOH F C I I - - r F D D ; M M ; Y Y ; H H ; M M ETB

F 2: SOH F C I I - - r F D D ; M M ; H H ; M M ETB

F 3: SOH F C I I - - r F WD ; D D ; M M ; H H ; M M ETB

Enquire end of summertime

SOH F C I I - - w p p p p p p p p ETB

Answer

SOH A F W W D M M p p p p p p p p ETB

The answer depends on each set format.

Set time shifting

SOH F C I J - - r N N N - - - - - ETB

NNN = minutes

Enquire time shifting

SOH F C I J - - w p p p p p p p p ETB

Answer

SOH A N N N p p p p p p p p ETB

Password

Set password

SOH	F	C	K	A	-	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: Indication of password, 4 digit ASCII number in mm (0000 ... 9999)

Enquire password

SOH	F	C	K	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set function group

SOH	F	C	K	B	-	-	r	A	B	C	D	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

A - Function menu

0 = free

1 = blocked

B - Memory card

0 = free

1 = only reading access

2 = access blocked

C - Entry

0 = free

1 = only masks blocked

2 = no entry possible

D - Print module guiding

0 = free

1 = entry of number of pieces possible

2 = no manual print release

Enquire function group

SOH	F	C	K	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	a	b	c	d	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set password active

SOH	F	C	K	C	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – inactive (N in display)

N = 1 – active (J in display)

Enquire password active

SOH	F	C	K	C	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Print

Set line number of label (n digits)

SOH	F	B	A	A	-	-	r	N	ETB
-----	---	---	---	---	---	---	---	---	-----

N: Indication of line number in ASCII (1, 10, 100, ...)

Enquire line number of label

SOH	F	B	A	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Start /Stop command

Additionally to the start / stop command it is possible to interrupt a print order via parameter / remote set.

SOH	F	D	-	-	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = '0' – interrupt printing

N = '1' – continue printing

N = '2' – cancel print order, when it is already stopped

Reset error

Reset error

SOH	F	C	M	H	-	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNN = Indication of current error ID or '9999"

Enquire error

SOH	F	C	M	H	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	0	0	0	0	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Readout error ID and error text

SOH	F	C	M	H	A	-	w	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	;	error text	;	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	------------	---	---	---	---	---	---	---	---	---	-----

Item number of print order

By means of this command the Host computer can enquire following item numbers:

Complete number of current print order

SOH	F	B	B	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Number of labels which are still to print

SOH	F	B	B	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Number of labels which are already printed

SOH	F	B	B	C	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Interval in cutter mode

SOH	F	B	B	D	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

At the end of one of these commands the printer returns the corresponding number as ASCII value (4 res. 5 digits) in the answer set.

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

With this set it is also possible to transmit the item number of print order and the interval (in cutter mode) to the printer.

Item number of print order

SOH	F	B	B	A	-	-	r	N	N	N	N	N	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNNN: 5 digits item number of order

Interval in cutter mode

SOH	F	B	B	D	-	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNNNN: Interval

Start printing

SOH	F	B	C	-	-	-	r	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

This command starts the print order which is actually set in the printer. The current parameter such as print mode, speed, initialisation etc. are used. Therefore it is possible to print e.g. item numbers with 5 digits. However, before you have to transmit the corresponding item number with set 'FBBA'.

SOH	F	B	D	-	-	-	r	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Start printing (see above) but without tear off offset.

SOH	F	B	E	-	-	-	r	n	n	n	n	n	n	n	n	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

With this command the printjob identifier which appears in "printing" res. "stopped" window is assigned to a print order. In case that only blanks are transmitted, then the printjob identifier is deleted and the display shows "noname".

Initialisation of page handling

SOH	F	B	F	-	-	-	r	ETB
-----	---	---	---	---	---	---	---	-----

Selection of current page

SOH	F	B	G	-	-	-	r	N	ETB
-----	---	---	---	---	---	---	---	---	-----

N: current page number (1..10)

Select order of pages which are to print

SOH	F	B	H	-	-	-	r	P ₁	P ₂	P ₃	ETB
-----	---	---	---	---	---	---	---	----------------	----------------	----------------	-----

P₁; P₂;...= pages which are to print

Generation of page without print start

SOH	F	B	I	-	-	-	r	S	ETB
-----	---	---	---	---	---	---	---	---	-----

With this command the corresponding page is only generated, i.e. no print start signal is sent.

S = 1: sorted (printed are e.g. pages 1-5, then again 1-5 etc.)

S = x: unsorted (printed are x times page 1, then x times page 2, etc.)

Feed

Release a label feed

SOH	F	E	-	-	-	-	r	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Test print

Release a test print

SOH	F	F	-	-	-	-	r	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Status print

Parameter set in order to print status report

SOH	F	C	M	Q	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0: Printer settings

N = 1: Bar codes

N = 2: Fonts

Cancel print orders

Cancel all active print orders

SOH	F	G	A	-	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = -: Cancel active print orders and delete all label data

N = 1: Cancel active print orders and receive label data

With the execution of this command:

- possible upcoming errors are confirmed
- possible upcoming customised entries are cancelled

Remote console

Set port

SOH	F	C	R	A	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – Off

N = 1 – COM1

N = 2 – Ethernet

Enquire port

SOH	F	C	R	A	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set sending interval of display contents

SOH	F	C	R	B	-	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – on demand

N = 1 – at each changing of display contents

N = 500...5000 – sending interval in ms

Enquire interval of display contents

SOH	F	C	R	B	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Emulation

Set emulation

SOH	F	Z	-	-	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – CVPL (Carl Valentin Programming Language)

N = 1 – ZPL II[®] (Zebra Programming Language)

Enquire emulation

SOH	F	Z	-	-	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

PARAMETER SETS FOR OPTIONS

Network

Sets for option Ethernet

General

SOH	F	C	L	A	-	-	r	C	0	A	8	0	0	1	5	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

All network parameter sets start in the third column with a 'L'. Column 4 shows the identification for the corresponding network parameter. Column 5 can show another sub-identification.

Because of the fact that the argument size is limited to 8 characters, the IP addresses (IP address, network mask, gateway address) which consist of 32 bit are transmitted in HEX presentation. For all data which is transmitted in HEX presentation (also the MAC address) it is allowed to use capital as well as small letters.

In contrary to the parameter settings of the other interfaces, the settings of the following sets were saved immediately onto Flash, i.e. it is not necessary to save the currently set configuration before switching off the printer so the modifications are still available after switching on.

So that the made modifications become active, also without printer Reset it is necessary to transmit a corresponding Z set which effects a Reset of the network devices.

Set IP address (e.g. 192.168.0.21)

SOH	F	C	L	A	-	-	r	C	0	A	8	0	0	1	5	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire IP address

SOH	F	C	L	A	-	-	w	C	0	A	8	0	0	1	5	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	C	0	A	8	0	0	1	5	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set netmask (e.g. 255.255.255.0)

SOH	F	C	L	B	-	-	r	F	F	F	F	F	F	0	0	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire netmask

SOH	F	C	L	B	-	-	w	F	F	F	F	F	F	0	0	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	F	F	F	F	F	F	0	0	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set Gateway address (e.g. 192.168.0.1)

SOH	F	C	L	C	-	-	r	C	0	A	8	0	0	0	1	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Enquire Gateway address

SOH	F	C	L	C	-	-	w	C	0	A	8	0	0	0	1	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	C	0	A	8	0	0	0	1	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set transmission mode (e.g. auto recognition)

SOH	F	C	L	D	-	-	r	0	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

0 = auto recognition

1 = 10 MBit/s half duplex

2 = 10 MBit/s full duplex

3 = 100 MBit/s half duplex

4 = 100 MBit/s full duplex

Enquire transmission mode

SOH	F	C	L	D	-	-	w	0	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set support DHCP

SOH	F	C	L	E	-	-	r	N	ETB
-----	---	---	---	---	---	---	---	---	-----

N: 0 = Off

1 = On

Enquire support DHCP

SOH	F	C	L	E	-	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Assign printer name

SOH	F	C	L	F	-	-	r	N	N	N	N	N	N	N	N	N	N	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: printer name is allowed to exist of max. 11 characters (A..Z, a..z, 0..9, -, ,)

Enquire printer name

SOH	F	C	L	F	-	-	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	N	N	N	N	;	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set MAC address (e.g. 00-07-4A-43-19-08)

SOH	F	C	L	M	B	-	r	0	0	0	7	4	A	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

SOH	F	C	L	M	A	-	r	4	3	1	9	0	8	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

A MAC address has a width of 48 bit and is normally indicated in hexadecimal.

With a B record it is possible to modify our identification of the MAC address. All our machines start with 00-07-4A as default. This corresponds to the Memory-Pool which the MAC address committee assigned to us to guarantee that the MAC address is world-wide manufacturer-spreading unique.

With the A record it is possible to set any address in our pool.

Enquire MAC address

SOH	F	C	L	M	B	-	w	0	0	0	7	4	A	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

SOH	F	C	L	M	A	-	w	4	3	1	9	0	8	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	0	0	7	4	A	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

SOH	A	4	3	1	9	0	8	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NTP Server

NTP (Network Time Protocol) is a standardised Internet protocol permitting the synchronisation of real-time clocks of network participants. The printer connects itself with a time server and align every 60 minutes its internal real-time clock with that of the time server in order to correct possible differences.

The address of server (IP address) can be freely configured in the printer. The communication is effected by UDP and the fixed set port 123. The service in the printer is deactivated by transmitting the server address 0.0.0.0.

The time servers work together with the coordinated world time (UTC) and therefore an additional time shift is needed compared to the reference time. For Germany it is e.g. +1 hour.

The current state of the connexion can be queried with a status set.

Set NTP Server IP

SOH	F	C	L	N	I	-	r	N	ETB
-----	---	---	---	---	---	---	---	---	-----

N = X.X.X.X (X = 0..255)

Enquire NTP Server IP

SOH	F	C	L	N	I	-	w	pppppppp	ETB
-----	---	---	---	---	---	---	---	----------	-----

Answer

SOH	A	N	N	N	N	N	N	N	N	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

0.0.0.0 deactivates the NTP service

Readout NTP status

SOH	F	C	L	N	S	-	w	pppppppp	ETB
-----	---	---	---	---	---	---	---	----------	-----

Answer

SOH	A	N	-	-	-	-	-	-	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: OK / ERROR / OFF

Set time zone (hour offset)

SOH	F	C	L	N	Z	-	r	N	ETB
-----	---	---	---	---	---	---	---	---	-----

N: -12, 12

Enquire time zone (hour offset)

SOH	F	C	L	N	Z	-	w	pppppppp	ETB
-----	---	---	---	---	---	---	---	----------	-----

Answer

SOH	A	N	N	N	N	N	N	N	N	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Reset network device

SOH	F	C	L	Z	-	-	r	-----	ETB
-----	---	---	---	---	---	---	---	-------	-----

For this set is no enquiry possible. This set causes that modifications made by the transfer of the previous sets become effective.

Memory Card

Save a label onto Memory Card

SOH	F	M	A	O	-	-	r	F	ETB
-----	---	---	---	---	---	---	---	---	-----

- O - In case a label with the entered name exists already then the label is overwritten without an enquiry.
If you enter another value as 0, an enquiry appears demanding if you want to overwrite.
- F - File name of the label which is to save. Drive* and path name are optional, i.e. the file name is allowed to have more than 8 characters but is limited to 79.

Load a label from Memory Card

SOH	F	M	B	-	-	-	r	F	ETB
-----	---	---	---	---	---	---	---	---	-----

- F - File name of label which is to load. Drive* and path name are optional, i.e. the file name is allowed to have more than 8 characters but is limited to 79.

Delete a label from Memory Card

SOH	F	M	C	-	-	-	r	F	ETB
-----	---	---	---	---	---	---	---	---	-----

- F - File name of label which is to delete. Drive* and path name are optional, i.e. the file name is allowed to have more than 8 characters but is limited to 79.

Format Memory Card

SOH	F	M	D	-	-	-	r	D	ETB
-----	---	---	---	---	---	---	---	---	-----

- D - Optional drive* identification with colon (e.g. A:).
In case no drive is indicated, then the currently selected is formatted.

Copy Memory Card

SOH	F	M	E	-	-	-	r	D	ETB
-----	---	---	---	---	---	---	---	---	-----

- D - Optional drive* identification with colon (e.g. B: → A:).
In case no drives are indicated it is copied from the current to the current drive (A: → A: or B: → B:).
The indication '→' indicates the direction of the copying process, i.e. the source drive is at the left side and the final drive at the right side.

* Printers from the series Vario II are equipped with 2 PCMCIA Memory Card drives. The left drive (front view) is called A and the right drive called B.

Save graphic onto Memory Card**Cancel function: no graphic is saved onto Memory Card**

SOH | F | M | F | A | - | - | r | ETB

No parameter necessary

Activate function

SOH | F | M | F | B | - | - | r | F | ETB

F – File identification, optional drive* and directory identification**Accept function: save graphic from print buffer onto Memory Card**

SOH | F | M | F | C | O | - | r | ETB

O - In case a label with the entered name already exists, then it is overwritten without an enquiry.
If you enter another value as 0, an enquiry appears demanding if you want to overwrite.

Readout table of contents

SOH | F | M | G | - | - | - | w | X | ETB

X = Drive [A,B] (optional)

Answer:

The complete table of contents of the indicated drive is returned. The directory entries show the following format:

SOH | A | F | S | A | ETB

F = File name*S* = File size and/or <DIR> for directory*A* = File attributes**Readout free memory space**

SOH | F | M | H | - | - | - | w | X | p | p | p | p | p | p | p | p | ETB

X = Drive [A,B] (optional)

Answer:

SOH | A | X | n | n | n | n | - | - | - | p | p | p | p | p | p | p | p | ETB

X = Drive [A,B]

n = Memory space in KB

* Printers from series Vario II are equipped with 2 PCMCIA Memory Card drives. The left drive (front view) is called A and the right drive called B.

Create directory

SOH	F	M	I	-	-	-	r	P	ETB
-----	---	---	---	---	---	---	---	---	-----

P = Drive* and directory identification

Create directory

(create directory without warning in case the directory is already existing)

SOH	F	M	I	O	-	-	r	P	ETB
-----	---	---	---	---	---	---	---	---	-----

O - In case a directory with the entered name already exists, then it is overwritten without an enquiry.

If you enter another value as O, an enquiry appears demanding if you want to overwrite.

P - Drive* and directory identification

Delete directory

SOH	F	M	J	-	-	-	r	P	ETB
-----	---	---	---	---	---	---	---	---	-----

P = Drive* and directory identification

Note that it is impossible to delete the current directory!

Change directory

SOH	F	M	K	-	-	-	r	P	ETB
-----	---	---	---	---	---	---	---	---	-----

P = Drive* and directory identification

Transfer file from printer

SOH	F	M	L	-	-	-	w	F	ETB
-----	---	---	---	---	---	---	---	---	-----

F - File name of file which is to transfer. Drive* and path name are optional, i.e. the file name is allowed to have more than 8 characters but is limited to 79.

Answer:

SOH	A	F	*	S	ETB	Data
-----	---	---	---	---	-----	------

F = File name

S = File size in in Byte

* Printers from series Vario II are equipped with 2 PCMCIA Memory Card drives. The left drive (front view) is called A and the right drive called B.

Cutter

Set cutter mode

SOH	F	C	D	D	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – cutter mode Off

N = 1 – single cut

N = 2 – mode 1 (w/o cutter offset), print no. of pieces w. cut after each label w/o backfeed

N = 3 – mode 2 (w backfeed), print no. of pieces w. cut after each label w. backfeed

N = 4 – interval cut with final cut, transmit interval with later

N = 5 – interval cut without final cut, transmit interval width later

N = 6 – final cutt (cut after print end)

Enquire cutter mode

SOH	F	C	D	D	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set cutter offset

SOH	F	C	S	C	A	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire cutter offset

SOH	F	C	S	C	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set automatic return On/Off

SOH	F	C	S	C	F	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – Off

N = 1 – On (default)

Enquire automatic return On/Off

SOH	F	C	S	C	F	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Dispenser

Set dispenser mode

SOH	F	C	D	C	-	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – dispenser mode Off

N = 1 – external I/O static

N = 2 – dispenser photocell

N = 3 – external I/O static continuous

N = 4 – dispenser photocell continuous

N = 5 – external I/O dynamic

N = 6 – external I/O dynamic continuous

Enquire dispenser mode

SOH	F	C	D	C	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set dispenser level photocell

SOH	F	C	C	F	-	-	r	V	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NN: offset value, 2 digit ASCII number in 1/10 Volt (5...40)


Enquire dispenser level photocell

SOH	F	C	C	F	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----


Answer

SOH	A	V	N	N	-	-	-	-	-	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Output

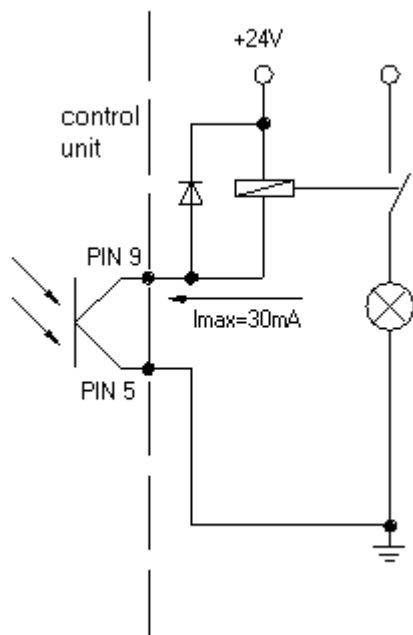

Input

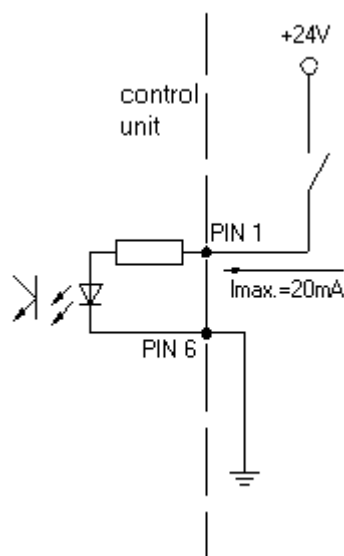

Circumstance I

Control of printer is effected by an electronic connection of an external control (e.g. PLC) at galvanically separated I/Os of printer. Here by the dispensing inputs the corresponding functions can be released according to settings of input trigger. At dispensing outputs, different operating conditions are signalised.

Example.: A label print should be released

Printer is in a dispensing mode, a print order is started and printer is in 'waiting' mode.

The corresponding functions lay on dispensing input IN1. For this entry the input trigger is on '1' (increasing flank). If the connected control (PLC) now a tension of approx. 24V on IN1, the printer starts the label print. If the input trigger is set to '0' (falling flank), printer should start the label print if no more tension is set to IN1.

Use the following parameter sets in order to execute the corresponding settings.

Enquire current status of dispenser inputs

SOH	F	C	M	D	A	-	w	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	1	2	3	4	5	6	7	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set status of dispenser outputs

SOH	F	C	M	D	B	-	r	1	2	3	4	5	6	7	8	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (outputs 1-8): 1 – output will be set, 0 – output will be deleted

Enquire status of dispenser outputs

SOH	F	C	M	D	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (outputs 1-8): 1 – output is active, 0 – output is not active

Answer

SOH	A	0	1	2	3	4	5	6	7	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set input trigger

SOH	F	C	M	D	C	-	r	1	2	3	4	5	6	7	8	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (inputs 1-8): 1 – increased, 0 – decreased
s – I/O signal by interface, x – I/O signal blocked

Enquire input trigger

SOH	F	C	M	D	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	1	2	3	4	5	6	7	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set output signal level

SOH	F	C	M	D	D	-	r	1	2	3	4	5	6	7	8	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (outputs 1-8): 1 – signal level 1, 0 – signal level 0
s – I/O signal by interface, x – I/O signal blocked

Enquire output signal level

SOH	F	C	M	D	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	1	2	3	4	5	6	7	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Circumstance II

Control of printer is effected by parameter sets, i.e. by Ethernet or serial interface (e.g. PC).

With beginning of software version 1.44 it is possible to execute the before mentioned functions by parameter sets and to use dispensing inputs and outputs for the control of external applications/machines.

The release of a label print can consequently be released by the simulation of an active signal at IN1 (soh) ... (etb). The allocation of a function to a dispensing input depends on printer model.

If signals of an external application/machine are connected, its current status can be identified by (soh)FCMDA-wppppppp(etb).

The current operating mode of printer is signalled by the corresponding status messages (cp. auto status, status enquiry, ...).

If control signals of an external application/machine connected to dispensing outputs, these can be set by (soh)FCMDB-r12345678(etb).

Listed below are the corresponding parameter sets.

Set I/O protocol port

SOH	F	C	M	D	E	-	r	T	C	P	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Port: Off
 COM1
 COM2
 TCP

Enquire I/O protocol port

SOH	F	C	M	D	E	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	1	2	3	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set software input

SOH	F	C	M	D	F	-	r	1	2	3	4	5	6	7	8	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (inputs 1-8): 1 – set software input
 0 – delete software input
 - – not considering software input
 p – pulse, execute software input once

Enquire current status of software inputs

SOH	F	C	M	D	F	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	0	1	2	3	4	5	6	7	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set software output

SOH	F	C	M	D	G	-	r	1	2	3	4	5	6	7	8	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

1-8 (outputs 1-8): 1 – set software output
 0 – delete software output

Set dispenser offset

SOH	F	C	S	D	A	-	r	V	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

V: pre-sign of offset (always +)

NNN: offset value, 3 digit ASCII number in 1/10 mm

Enquire dispenser offset

SOH	F	C	S	D	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	V	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set external synchronisation

SOH	F	C	S	D	B	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: 0 = Off

1 = On

Enquire external synchronisation

SOH	F	C	S	D	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set debounce start signal

SOH	F	C	S	D	C	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: debounce time start signal in ms (0...100)

Enquire debounce start signal

SOH	F	C	S	D	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set start signal delay

SOH	F	C	S	D	D	-	r	N	N	N	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: start signal delay in 1/100 s (0...999)

Enquire start signal delay

SOH	F	C	S	D	D	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set save start signal

SOH	F	C	S	D	E	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: 0 = Off
1 = On

Enquire save start signal

SOH	F	C	S	D	E	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set cancel continuous print (operating mode)

SOH	F	C	S	D	F	A	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N: 0 = Off
1 = On

Enquire cancel continuous print (operating mode)

SOH	F	C	S	D	F	A	w	p	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Dispensing photocell**Enquire current value at dispensing photocell**

SOH	F	C	M	B	E	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

NNN: value of dispensing photocell, 3 digit ASCII number in 1/100 V

Enquire condition of dispensing photocell

SOH	F	C	M	B	E	A	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – no label is at photocell

N = 1 – label is at photocell

The set switching threshold of dispensing photocell is taken into consideration.

Scanner

Set scanner operating mode

SOH	F	C	D	M	-	-	r	M	P	N	F	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

M = Operating mode

0 = Off

1 = Mode 1 (data comparison)

2 = Mode 2 (check only readability)

P = Interface

0 = COM1

1 = COM2

This parameter is ignored as COM2 is always used as scanner interface at the moment.

N = Number of bad readings (NoRead)

N = -, 0 ... 8 (- = 0 NoReads, 0 = 1 NoRead ... 8 = 9 NoReads)

Number of consecutive bad readings after which an error message appears.

At '-' (0 NoReads) no error message appears, i.e. the print is not interrupted. Only a warning is displayed at the screen.

F = Label feed (FeedLabel)

F = 0 ... 4 (0 = 1 FeedLabel... 4 = 5 FeedLabels)

Enquire scanner operating mode

SOH	F	C	D	M	-	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	M	P	N	F	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Set scan offset

SOH	F	C	D	M	A	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = Scan offset in 1/10 mm

Enquire scan offset

SOH	F	C	D	M	A	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = Current scan offset in 1/10 mm

Set scan length

SOH	F	C	D	M	B	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = Scan length in 1/10 mm

Enquire scan length

SOH	F	C	D	M	B	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = Current scan length in 1/10 mm

Set scan mode

SOH	F	C	D	M	C	-	r	N	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = 0 – scan during printing

N = 1 – scan after printing

Enquire scan mode

SOH	F	C	D	M	C	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	-	-	-	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = current scan mode

Set scan delay (scan after printing)

SOH	F	C	D	M	D	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = scan delay in ms [0...9990]

Require scan delay

SOH	F	C	D	M	D	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = current scan delay ms

Set scan timeout (scan after printing)

SOH	F	C	D	M	E	-	r	N	N	N	N	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = scan timeout in ms [0..9990]

Require scan timeout

SOH	F	C	D	M	E	-	w	p	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

Answer

SOH	A	N	N	N	N	-	-	-	-	p	p	p	p	p	p	p	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

N = current scan timeout in ms

Scanner variable

In mode 1 (data comparison) it is necessary to fix the order of bar code data to scan several codes onto one label. Because of this reason bar code data has to be defined as scanner variable in text sets. The text set has the following structure:

SOH	BM	[n]	=	S	V	(	a	;	f	)	text data	ETB
-----	----	-----	---	---	---	---	---	---	---	---	-----------	-----

=SV identification scanner variable

a field active (0 = not active, 1 = active, i.e. code is scanned)

f field number for definition of code order (1 ...)

Examples

fixed text:

(SOH)BM[1]=SV(1;1)123456(ETB)

variable text (counter):

(SOH)BM[1]=SV(1;1)=CN(10;0;4;+1;1)0001(ETB)

Save configuration permanent

In case you want to save the described settings permanent into the printer, then you have to transmit the following command to the printer.

SOH	F	X	-	-	-	-	r	N	-	-	-	-	-	-	-	ETB
N: 0 = save current parameter																
1 = set all parameters to default values																

Readout configuration

SOH	F	X	-	-	-	-	w	-	-	-	-	-	-	-	-	ETB
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----

The printer sends as answer all current settings as parameter sets.

Status enquiry

Host computer can receive information about the printer by the serial interface.
The status enquiry has the following data format:

SOH	S	ETB	S = ASCII
-----	---	-----	-----------

Status return information:

After receiving the status enquiry the printer sends the corresponding status return information.

Data format of status enquiry

SOH	1. Byte								2. Byte								5. – 1. digit	ETB
	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1		

1. Byte	=	1. status byte
		8. Bit = free 7. Bit = always set 6. Bit = free 5. Bit = 1 – active print order 0 – no. of pieces = 0 (no print order) 4. Bit = 1 – stop key activated 0 – stop key not activated 3. Bit = cutter error 0 – no error; 1 – error 2. Bit = labels 0 – no error; 1 – error 1. Bit = transfer ribbon 0 – no error; 1 – error
2. Byte	=	2. status byte
		8. Bit = free 7. Bit = free 6. Bit = free 5. Bit = free 4. Bit = free 3. Bit = memory card 2. Bit = mask set 1. Bit = printhead temperature
5.-1. position	=	number of pieces with 5 digits as ASCII characters min. '00000' / max. '65535'

AUTOSTATUS

The printers are equipped with an auto status function, i.e. in certain operating modes the printer actively sends the corresponding status. This can be enquired by the serial interface.

To activate the auto status, the host computer has to send the following command to the printer:

SOH	G	1. Byte	2. Byte	ETB
-----	---	---------	---------	-----

Each of the below indicated message which is observed and send by the printer has to be transmitted with a set Bit (see table below 1. Byte and 2. Byte) to the printer via the auto state function. The printer sends after each performed condition the corresponding message (answer) to the host computer.

The following messages are provided:

- 1 Start of generation**
- 2 End of generation**
The printer sends this state in case data for a complete label was generated. The test print was not taken into consideration.
For counters/date variables the printer sends for each label a status cycle (start, end).
- 3 Start of printing**
- 4 End of printing**
The start of the print is send in case the generated data is send.
The end of the print is send in case the print of the label is finished and the motor has stopped.
- 5 Start of cutting**
- 6 End of cutting**
This status describes the cutting. Here it is possible to check the end of the cutting at timeout
→ error.
- 7 Start of feeding**
- 8 End of feeding**
This status is send in case an additional feeding (dispenser, cutter, tear off) is released.
- 9 Start of a print order**
- 10 End of print order**
This status signalises the start and end of a complete print order (1...99999 labels). This status is active in all operating modes.
- 11 Error**
This status message is send in case an error occurs.

The printer sends the auto status in the following format to the host computer:

SOH	G	1. Byte	2. Byte	ETB
-----	---	---------	---------	-----

1. Byte

8. Bit	7. Bit	6. Bit	5. Bit	4. Bit	3. Bit	2. Bit	1. Bit
start generating	end generating	start printing	end printing	start cutting	end cutting	start feeding	always 0

2. Byte

8. Bit	7. Bit	6. Bit	5. Bit	4. Bit	3. Bit	2. Bit	1. Bit
end feeding	start print order	end print order	error	free	free	free	always 0

Attention: Bit 1 has to be in 1. Byte and 2. Byte always 0, otherwise the printer possibly could recognise SOH or ETB.

At the status message of the printer to the host computer always at least 1 Bit is set. However, it could be occur that several Bits are set at the same time.

At the status demand of the host computer to the printer it is also possible that several Bits are set at the same time.

The auto status demand is saved in the printer, i.e. it is set to 0 after switching off/on. Therefore it is necessary to demand it anew after each time the printer is switched on.

Example:

The printer should observe the start of a print order. For this the host computer sends the following demand to the printer.

SOH	G	00000000	01000000	ETB
-----	---	----------	----------	-----

After the condition is fulfilled (= start of the print order) the printer sends the following message to the host computer:

SOH	G	00000000	01000000	ETB
-----	---	----------	----------	-----

With regard to the contents the answer corresponds always to the format set.

CHARACTER SETS

		Bitmap Fonts														Vector Fonts (only Vario II 107/12)					
ID	01	02	03	04	05	07	21	22	23	24	28	29	1/2	3/4	5/6	7/8	9/10	11/12			
	7x9 10x14	10x14 15x21	15x21 22x31	32x45 48x67	15x26 ¹⁾ 22x39 ¹⁾	10x18 ¹⁾ 15x27 ¹⁾	1,0; 13	1,8; 21	2,6; 31	5,6; 67	4,0; 48	0,8; 9	Helvetica Bold	Helvetica Roman	Swiss Light	Basker- ville	Brush Script	Mono- space			
GEM German	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
GEM English	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
GEM French	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
GEM Swedish	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
GEM Danish	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
CP 437 (German)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
CP 850 (multilingual West European)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
CP 852 (multilingual East European)	5)	5)	5)	5)	5)	5)	5)	5)	5)	5)	5)	5)	6)	6)	6)	6)	6)	6)			
CP1250 (Latin 2; Central European)	3)	3)	3)	3)	3)	3)	3)	3)	3)	3)	3)	3)	2)	2)	6)	6)	6)	2)			
CP1251 (Cyrillic)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	4)	4)	6)	6)	6)	4)			
CP1252 ANSI (Latin 1, West European)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)			
CP1253 (Greek)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	4)	4)	6)	6)	6)	4)			
CP1254 (Latin 5, Turkish)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	4)	4)	6)	6)	6)	4)			
CP 1257 (Baltic)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	6)	4)	4)	6)	6)	6)	4)			
		¹⁾ descenders ²⁾ standard ³⁾ at the moment not available, can be replaced by vector fonts (ID3; ID11) ⁴⁾ on demand, beginning with version 1.41a ⁵⁾ on demand, only 200 dpi printers ⁶⁾ not available																			

Beginning with version 1.41a different character sets were offered but as default the printers are equipped with Latin 1.

Following languages are supported:

Afrikaans	English	Italian	Serbian
Albanian	Estonian	Latvian	Slovak
Basque	Faeroese	Lithuanian	Slovenian
Belarusian	Finnish	Macedonian (FYROM)	Spanish
Bulgarian	French	Norwegian (Bokmal)	Swahili
Catalan	German	Norwegian (Nynorsk)	Swedish
Croatian	Greek (modern, monotonic)	Polish	Turkish
Czech	Hungarian	Portuguese	Ukrainian
Danish	Icelandic	Romanian	
Dutch	Indonesian	Russian	

Outline of the most important character sets for Central and East European languages

Codepage	Unterstützte Sprachen
1251 (Cyrillic)	Russian, Bearusian, Serbian, Bulgarian, Ukrainian, Macedonian
1250 (Latin 2, Central European)	Romanian, Slovak, Hungarian, Slovenian, Croatian, Serbian, Polish, Czech
852 (multilingual, Eas European)	Polish, Czech, Romanian, Slovak, Hungarian, Slovenian, Croatian, Serbian
1257 (Baltic)	Estonian, Latvian, Lithuanian

International ANSI character font

ANSI	Dec.	HEX	ANSI	Dec.	HEX	ANSI	Dec.	HEX	ANSI	Dec.	HEX	ANSI	Dec.	HEX
SP	32	20	Q	81	51	,	130	82	³	179	B3	ä	228	E4
!	33	21	R	82	52	f	131	83	´	180	B4	å	229	E5
"	34	22	S	83	53	”	132	84	µ	181	B5	æ	230	E6
#	35	23	T	84	54	…	133	85	¶	182	B6	ç	231	E7
\$	36	24	U	85	55	†	134	86	·	183	B7	è	232	E8
%	37	25	V	86	56	‡	135	87	ˆ	184	B8	é	233	E9
&	38	26	W	87	57	ˆ	136	88	ˆ	185	B9	ê	234	EA
'	39	27	X	88	58	‰	137	89	°	186	BA	ë	235	EB
(	40	28	Y	89	59	Š	138	8A	»	187	BB	ì	236	EC
)	41	29	Z	90	5A	Š	139	8B	¼	188	BC	í	237	ED
*	42	2A	[	91	5B	Œ	140	8C	½	189	BD	î	238	EE
+	43	2B	\	92	5C		141	8D	¾	190	BE	ï	239	EF
,	44	2C	]	93	5D	Ž	142	8E	¿	191	BF	ð	240	F0
-	45	2D	^	94	5E		143	8F	À	192	C0	ñ	241	F1
.	46	2E	_	95	5F		144	90	Á	193	C1	ò	242	F2
/	47	2F		96	60	‘	145	91	Â	194	C2	ó	243	F3
0	48	30	a	97	61	’	146	92	Ã	195	C3	ô	244	F4
1	49	31	b	98	62	“	147	93	Ä	196	C4	õ	245	F5
2	50	32	c	99	63	”	148	94	Å	197	C5	ö	246	F6
3	51	33	d	100	64	•	149	95	Æ	198	C6	÷	247	F7
4	52	34	e	101	65	—	150	96	Ç	199	C7	ø	248	F8
5	53	35	f	102	66	—	151	97	È	200	C8	ù	249	F9
6	54	36	g	103	67	~	152	98	É	201	C9	ú	250	FA
7	55	37	h	104	68	™	153	99	Ê	202	CA	û	251	FB
8	56	38	i	105	69	š	154	9A	Ë	203	CB	ü	252	FC
9	57	39	j	106	6A	›	155	9B	Ì	204	CC	ý	253	FD
:	58	3A	k	107	6B	œ	156	9C	Í	205	CD	þ	254	FE
;	59	3B	l	108	6C		157	9D	Î	206	CE	ÿ	255	FF
<	60	3C	m	109	6D	ž	158	9E	Ï	207	CF			
=	61	3D	n	110	6E	Ÿ	159	9F	Ð	208	D0			
>	62	3E	o	111	6F		160	A0	Ñ	209	D1			
?	63	3F	p	112	70	ı	161	A1	Ò	210	D2			
@	64	40	q	113	71	ø	162	A2	Ó	211	D3			
A	65	41	r	114	72	£	163	A3	Ô	212	D4			
B	66	42	s	115	73	¤	164	A4	Õ	213	D5			
C	67	43	t	116	74	¥	165	A5	Ö	214	D6			
D	68	44	u	117	75	¦	166	A6	×	215	D7			
E	69	45	v	118	76	§	167	A7	Ø	216	D8			
F	70	46	w	119	77	¨	168	A8	Ù	217	D9			
G	71	47	x	120	78	©	169	A9	Ú	218	DA			
H	72	48	y	121	79	ª	170	AA	Û	219	DB			
I	73	49	z	122	7A	«	171	AB	Ü	220	DC			
J	74	4A	{	123	7B	¬	172	AC	Ý	221	DD			
K	75	4B		124	7C	-	173	AD	Þ	222	DE			
L	76	4C	}	125	7D	®	174	AE	ß	223	DF			
M	77	4D	~	126	7E	™	175	AF	à	224	E0			
N	78	4E		127	7F	°	176	B0	á	225	E1			
O	79	4F	€	128	80	±	177	B1	â	226	E2			
P	80	50		129	81	²	178	B2	ã	227	E3			

Codepage 437

Dec.	Dec.	Dec.	Dec.	Dec.
32		81 Q	130 é	179
33 !		82 R	131 â	180
34 ' ,		83 S	132 ä	181
35 #		84 T	133 à	182
36 \$		85 U	134 å	183
37 %		86 V	135 ç	184
38 &		87 W	136 ê	185
39 ' ,		88 X	137 ë	186
40 (		89 Y	138 è	187
41)		90 Z	139 ĩ	188
42 *		91 [	140 î	189
43 +		92 \	141 ï	190
44 ,		93]	142 Ä	191
45 -		94 ^	143 Å	192
46 .		95 _	144 É	193
47 /		96 `	145 æ	194
48 0		97 a	146 Æ	195
49 1		98 b	147 ô	196
50 2		99 c	148 ö	197
51 3		100 d	149 ò	198
52 4		101 e	150 û	199
53 5		102 f	151 ù	200
54 6		103 g	152 ÿ	201
55 7		104 h	153 Ö	202
56 8		105 i	154 Ü	203
57 9		106 j	155 ø	204
58 :		107 k	156 £	205
59 ;		108 l	157 ¥	206
60 <		109 m	158	207
61 =		110 n	159	208
62 >		111 o	160 á	209
63 ?		112 p	161 í	210
64 @		113 q	162 ó	211
65 A		114 r	163 ú	212
66 B		115 s	164 ñ	213 €
67 C		116 t	165 Ñ	214
68 D		117 u	166	215
69 E		118 v	167 °	216
70 F		119 w	168	217
71 G		120 x	169	218
72 H		121 y	170	219
73 I		122 z	171 ½	220
74 J		123 {	172 ¼	221
75 K		124 ¡	173	222
76 L		125 }	174 «	223
77 M		126 ~	175 »	224
78 N		127	176	225 ß
79 O		128 Ç	177	226
80 P		129 ü	178	227
				228
				229
				230 μ
				231
				232
				233
				234
				235
				236
				237 ø
				238
				239
				240
				241
				242
				243
				244
				245
				246
				247
				248 °
				249
				250
				251
				252
				253
				254
				255

91

Codepage 852*

Dec.		Dec.		Dec.		Dec.		Dec.	
32		81	Q	130	é	179		228	ń
33	!	82	R	131	â	180		229	ň
34	'	83	S	132	ä	181	Á	230	Š
35	#	84	T	133	û	182	Â	231	š
36	\$	85	U	134	ć	183	Ě	232	Ř
37	%	86	V	135	ç	184	Ş	233	Ú
38	&	87	W	136	ı	185		234	ř
39	'	88	X	137	ë	186		235	Ů
40	(	89	Y	138	Ö	187		236	ý
41	)	90	Z	139	ö	188		237	Ý
42	*	91	[	140	î	189	Ž	238	ţ
43	+	92	\	141	ž	190	ž	239	,
44	,	93	]	142	Ä	191		240	-
45	-	94	^	143	Č	192		241	'
46	.	95		144	É	193		242	
47	/	96	`	145	Ł	194		243	
48	0	97	a	146	Í	195		244	—
49	1	98	b	147	ô	196		245	§
50	2	99	c	148	ö	197		246	÷
51	3	100	d	149	L	198	Ǻ	247	ˆ
52	4	101	e	150	I	199	ă	248	˙
53	5	102	f	151	Ś	200		249	¨
54	6	103	g	152	ś	201		250	·
55	7	104	h	153	Ö	202		251	ü
56	8	105	i	154	Ü	203		252	Ř
57	9	106	j	155	Ť	204		253	ř
58	:	107	k	156	t	205		254	
59	;	108	l	157	ł	206		255	
60	<	109	m	158	x	207			
61	=	110	n	159	č	208	đ		
62	>	111	o	160	á	209	Đ		
63	?	112	p	161	í	210	Ď		
64	@	113	q	162	ó	211	Ě		
65	A	114	r	163	ú	212	d		
66	B	115	s	164	À	213	Ň		
67	C	116	t	165	ą	214	í		
68	D	117	u	166	Ž	215	î		
69	E	118	v	167	ž	216	ě		
70	F	119	w	168	Ę	217			
71	G	120	x	169	ę	218			
72	H	121	y	170		219			
73	I	122	z	171	ż	220			
74	J	123	{	172	Ć	221	Ț		
75	K	124	128	173	ș	222	Ț		
76	L	125	129	174	«	223	Ó		
77	M	126	~	175	»	224	Ó		
78	N	127	△	176		225	ß		
79	O	128	Ç	177		226	Ô		
80	P	129	ű	178		227	Ñ		

* option

Dec.		Dec.		Dec.		Dec.		Dec.	
32		81	Q	130	é	179		228	ö
33	!	82	R	131	â	180		229	Õ
34	'	83	S	132	ä	181	Á	230	μ
35	#	84	T	133	à	182	Ä	231	R
36	\$	85	U	134	á	183	À	232	μ
37	%	86	V	135	ç	184	©	233	Û
38	&	87	W	136	ê	185		234	Û
39	'	88	X	137	ë	186		235	Ù
40	(	89	Y	138	è	187		236	ì
41	)	90	Z	139	ï	188		237	ý
42	*	91	[	140	î	189	¢	238	
43	+	92	\	141	ı	190	¥	239	,
44	,	93	]	142	Ä	191		240	-
45	-	94	^	143	Å	192		241	±
46	.	95	`	144	É	193		242	
47	/	96	~	145	æ	194		243	¾
48	0	97	a	146	Æ	195		244	¶
49	1	98	b	147	ô	196		245	§
50	2	99	c	148	ö	197		246	÷
51	3	100	d	149	ò	198	ã	247	°
52	4	101	e	150	û	199	Ã	248	˚
53	5	102	f	151	ù	200		249	ˆ
54	6	103	g	152	İ	201		250	·
55	7	104	h	153	Ö	202		251	¹
56	8	105	i	154	Ü	203		252	³
57	9	106	j	155	ø	204		253	²
58	:	107	k	156	£	205		254	
59	;	108	l	157	Ø	206		255	
60	<	109	m	158	Ş	207			
61	=	110	n	159	ş	208	º		
62	>	111	o	160	á	209	ª		
63	?	112	p	161	í	210	Ê		
64	@	113	q	162	ó	211	È		
65	A	114	r	163	ú	212	Ê		
66	B	115	s	164	ñ	213	Ñ		
67	C	116	t	165	Ñ	214	Í		
68	D	117	u	166	Ğ	215	Î		
69	E	118	v	167	ğ	216	İ		
70	F	119	w	168	¿	217			
71	G	120	x	169	®	218			
72	H	121	y	170		219			
73	I	122	z	171	½	220			
74	J	123	{	172	¼	221			
75	K	124		173	ı	222			
76	L	125	}	174	«	223			
77	M	126	~	175	»	224	Ó		
78	N	127	△	176		225	ß		
79	O	128	Ç	177		226	Ô		
80	P	129	ü	178		227	Ò		

93

GEM German

Dec.	Dec.	Dec.	Dec.	Dec.
32	81 Q	130 é	179 ¢	228 €
33 !	82 R	131 â	180 œ	229
34 ' ,	83 S	132 ä	181 Œ	230 μ
35 #	84 T	133 à	182 À	231
36 \$	85 U	134 â	183 Ã	232
37 %	86 V	135 ç	184 Õ	233
38 &	87 W	136 ê	185 §	234
39 ' ,	88 X	137 ë	186 ?	235
40 (	89 Y	138 è	187 †	236
41)	90 Z	139 ĩ	188 ¶	237 Ø
42 *	91 Ä	140 î	189 ©	238
43 +	92 Ö	141 ì	190 ®	239
44 ,	93 Ü	142 Å	191 ™	240
45 -	94 \	143 Å	192	241
46 .	95 ´	144 É	193 ...	242
47 /	96 ¯	145 æ	194 ‰	243
48 0	97 a	146 Æ	195 •	244
49 1	98 b	147 ô	196 —	245
50 2	99 c	148 ö	197 —	246
51 3	100 d	149 ò	198 °	247
52 4	101 e	150 û	199 Á	248 °
53 5	102 f	151 ù	200 Â	249
54 6	103 g	152 ÿ	201 È	250
55 7	104 h	153 Ö	202 Ê	251 ¹
56 8	105 i	154 Ü	203 Ë	252 º
57 9	106 j	155 ø	204 Ì	253 º
58 :	107 k	156 £	205 Í	254
59 ;	108 l	157 Ø	206 Î	255
60 <	109 m	158 ~	207 Ï	
61 =	110 n	159 ¯	208 Ò	
62 >	111 o	160 á	209 Ó	
63 ?	112 p	161 í	210 Ô	
64 @	113 q	162 ó	211	
65 A	114 r	163 ú	212	
66 B	115 s	164 ñ	213 Ù	
67 C	116 t	165 Ñ	214 Ú	
68 D	117 u	166	215 Û	
69 E	118 v	167	216 Ÿ	
70 F	119 w	168	217	
71 G	120 x	169 ' ,	218	
72 H	121 y	170 ”	219	
73 I	122 z	171 <	220	
74 J	123 ä	172 >	221	
75 K	124 ö	173	222	
76 L	125 ü	174 «	223 μ	
77 M	126 ß	175 »	224 \	
78 N	127 °	176 ã	225 ß	
79 O	128 Ç	177 õ	226	
80 P	129 ù	178 ¥	227	

GEM English

Dec.	Dec.	Dec.	Dec.	Dec.
32		81 Q	130 é	179 ¢
33 !		82 R	131 â	180 œ
34 ' ,		83 S	132 ä	181 Œ
35 #		84 T	133 à	182 À
36 \$		85 U	134 å	183 Ã
37 %		86 V	135 ç	184 Ö
38 &		87 W	136 ê	185 §
39 ' ,		88 X	137 ë	186 ?
40 (		89 Y	138 è	187 †
41)		90 Z	139 ĩ	188 ¶
42 *		91 Ä	140 î	189 ©
43 +		92 -	141 ï	190 ®
44 ,		93 Ü	142 Ä	191 ™
45 -		94 ¼	143 Å	192
46 .		95 `	144 É	193 ...
47 /		96	145 æ	194 ‰
48 0		97 a	146 Æ	195 •
49 1		98 b	147 ô	196 —
50 2		99 c	148 ö	197 —
51 3		100 d	149 ò	198 °
52 4		101 e	150 û	199 Á
53 5		102 f	151 ù	200 Â
54 6		103 g	152 ÿ	201 È
55 7		104 h	153 Ö	202 Ê
56 8		105 i	154 Ü	203 Ë
57 9		106 j	155 ø	204 Ì
58 :		107 k	156 £	205 Í
59 ;		108 l	157 Ø	206 Î
60 <		109 m	158 ~	207 Ï
61 =		110 n	159 —	208 Ò
62 >		111 o	160 á	209 Ó
63 ?		112 p	161 í	210 Ô
64 £		113 q	162 ó	211
65 A		114 r	163 ú	212
66 B		115 s	164 ñ	213 Ù
67 C		116 t	165 Ñ	214 Ú
68 D		117 u	166 ¼	215 Û
69 E		118 v	167 ½	216 Ÿ
70 F		119 w	168 ¾	217
71 G		120 x	169 ' ,	218
72 H		121 y	170 ”	219
73 I		122 z	171 <	220
74 J		123 ä	172 >	221
75 K		124 ö	173	222
76 L		125 ü	174 «	223 μ
77 M		126 ¾	175 »	224 \
78 N		127	176 ã	225 ß
79 O		128 Ç	177 õ	226
80 P		129 ù	178 ¥	227
				228 €
				229
				230 μ
				231
				232
				233
				234
				235
				236
				237 Ø
				238
				239
				240
				241
				242
				243
				244
				245
				246
				247
				248 °
				249
				250
				251
				252
				253
				254
				255

GEM French

Dec.	Dec.	Dec.	Dec.	Dec.
32	81 Q	130 é	179 ¢	228 €
33 !	82 R	131 â	180 œ	229
34 ' ,	83 S	132 à	181 Œ	230 μ
35 #	84 T	133 â	182 À	231
36 \$	85 U	134 â	183 Ã	232
37 %	86 V	135 ç	184 Ö	233
38 &	87 W	136 ê	185 §	234
39 ' ,	88 X	137 ë	186 ?	235
40 (	89 Y	138 è	187 †	236
41)	90 Z	139 ĩ	188 ¶	237 Ø
42 *	91 ô	140 î	189 ©	238
43 +	92 ç	141 ï	190 ®	239
44 ,	93 Ü	142 Ä	191 ™	240
45 -	94 ¼	143 Å	192	241
46 .	95 ½	144 É	193 ...	242
47 /	96 ¾	145 æ	194 ‰	243
48 0	97 a	146 Æ	195 •	244
49 1	98 b	147 ô	196 —	245
50 2	99 c	148 ö	197 —	246
51 3	100 d	149 ò	198 °	247
52 4	101 e	150 û	199 Á	248 °
53 5	102 f	151 ù	200 Â	249
54 6	103 g	152 ÿ	201 È	250
55 7	104 h	153 Ö	202 Ê	251
56 8	105 i	154 Ü	203 Ë	252
57 9	106 j	155 ø	204 Ì	253
58 :	107 k	156 £	205 Í	254
59 ;	108 l	157 Ø	206 Î	255
60 <	109 m	158 ~	207 Ï	
61 =	110 n	159 —	208 Ò	
62 >	111 o	160 á	209 Ó	
63 ?	112 p	161 í	210 Ô	
64 à	113 q	162 ó	211	
65 A	114 r	163 ú	212	
66 B	115 s	164 ñ	213 Ù	
67 C	116 t	165 Ñ	214 Ú	
68 D	117 u	166 ¼	215 Û	
69 E	118 v	167 ½	216 Ÿ	
70 F	119 w	168 ¾	217	
71 G	120 x	169 ' ,	218	
72 H	121 y	170 ”	219	
73 I	122 z	171 <	220	
74 J	123 é	172 >	221	
75 K	124 ñ	173	222	
76 L	125 è	174 «	223 μ	
77 M	126 ß	175 »	224 \	
78 N	127 °	176 ã	225 ß	
79 O	128 Ç	177 õ	226	
80 P	129 ü	178 ¥	227	

GEM Swedish

Dec.	Dec.	Dec.	Dec.	Dec.
32	81 Q	130 é	179 ¢	228 €
33 !	82 R	131 â	180 œ	229
34 ' ,	83 S	132 ä	181 Œ	230 μ
35 #	84 T	133 à	182 À	231
36 \$	85 U	134 â	183 Ã	232
37 %	86 V	135 ç	184 Ö	233
38 &	87 W	136 ê	185 §	234
39 ' ,	88 X	137 ë	186 ?	235
40 (	89 Y	138 è	187 †	236
41)	90 Z	139 ĩ	188 ¶	237 Ø
42 *	91 Ä	140 î	189 ©	238
43 +	92 Ö	141 ï	190 ®	239
44 ,	93 Å	142 Ä	191 ™	240
45 -	94 Ü	143 Å	192	241
46 .	95 _	144 É	193 ...	242
47 /	96 é	145 æ	194 ‰	243
48 0	97 a	146 Æ	195 •	244
49 1	98 b	147 ô	196 —	245
50 2	99 c	148 ö	197 —	246
51 3	100 d	149 ò	198 °	247
52 4	101 e	150 û	199 Á	248 °
53 5	102 f	151 ù	200 Â	249
54 6	103 g	152 ÿ	201 È	250
55 7	104 h	153 Ö	202 Ê	251
56 8	105 i	154 Ü	203 Ë	252
57 9	106 j	155 ø	204 Ì	253
58 :	107 k	156 £	205 Í	254
59 ;	108 l	157 Ø	206 Î	255
60 <	109 m	158 ~	207 Ï	
61 =	110 n	159 _	208 Ò	
62 >	111 o	160 á	209 Ó	
63 ?	112 p	161 í	210 Ô	
64 @	113 q	162 ó	211	
65 A	114 r	163 ú	212	
66 B	115 s	164 ñ	213 Ù	
67 C	116 t	165 Ñ	214 Ú	
68 D	117 u	166 ¼	215 Û	
69 E	118 v	167 ½	216 Ÿ	
70 F	119 w	168 ¾	217	
71 G	120 x	169 ' ,	218	
72 H	121 y	170 ”	219	
73 I	122 z	171 <	220	
74 J	123 ä	172 >	221	
75 K	124 ö	173	222	
76 L	125 å	174 «	223 μ	
77 M	126 ü	175 »	224 \	
78 N	127 °	176 ã	225 ß	
79 O	128 Ç	177 õ	226	
80 P	129 ü	178 ¥	227	

GEM Danish

Dec.	Dec.	Dec.	Dec.	Dec.
32	81 Q	130 é	179 ¢	228 €
33 !	82 R	131 â	180 œ	229
34 ' ,	83 S	132 ä	181 Œ	230 μ
35 #	84 T	133 à	182 À	231
36 \$	85 U	134 å	183 Ã	232
37 %	86 V	135 ç	184 Ö	233
38 &	87 W	136 ê	185 §	234
39 ' ,	88 X	137 ë	186 ?	235
40 (	89 Y	138 è	187 †	236
41)	90 Z	139 ĩ	188 ¶	237 Ø
42 *	91 Æ	140 î	189 ©	238
43 *	92 Ø	141 ï	190 ®	239
44 ,	93 Å	142 Ä	191 ™	240
45 —	94 Ö	143 Å	192	241
46 .	95 —	144 É	193 ...	242
47 /	96 —	145 æ	194 ‰	243
48 0	97 a	146 Æ	195 •	244
49 1	98 b	147 ô	196 —	245
50 2	99 c	148 ö	197 —	246
51 3	100 d	149 ò	198 °	247
52 4	101 e	150 û	199 Á	248 °
53 5	102 f	151 ù	200 Â	249
54 6	103 g	152 ÿ	201 È	250
55 7	104 h	153 Ö	202 Ê	251
56 8	105 i	154 Ü	203 Ë	252
57 9	106 j	155 ø	204 Ì	253
58 :	107 k	156 £	205 Í	254
59 ;	108 l	157 Ø	206 Î	255
60 <	109 m	158 ~	207 Ï	
61 =	110 n	159 —	208 Ò	
62 >	111 o	160 á	209 Ó	
63 ?	112 p	161 í	210 Ô	
64 ä	113 q	162 ó	211	
65 A	114 r	163 ú	212	
66 B	115 s	164 ñ	213 Ù	
67 C	116 t	165 Ñ	214 Ú	
68 D	117 u	166 ¼	215 Û	
69 E	118 v	167 ½	216 Ÿ	
70 F	119 w	168 ¾	217	
71 G	120 x	169 ' ,	218	
72 H	121 y	170 ”	219	
73 I	122 z	171 <	220	
74 J	123 æ	172 >	221	
75 K	124 ø	173	222	
76 L	125 å	174 «	223 μ	
77 M	126 Û	175 »	224 \	
78 N	127 °	176 ã	225	
79 O	128 Ç	177 õ	226 ß	
80 P	129 û	178 ¥	227	

FONT EXAMPLES

Bitmap fonts (not proportional)

Font 01 (8 x 11) ratio 3:3
 Font 02 (12 x 17) ratio 3:3
 Font 03 (18 x 26) ratio 2:2
 Font 04 (40 x 56) ratio 1:1
 Font 05 (18 x 32 with descender) ratio 2:2
 Font 07 (12 x 22 with descender) ratio 2:2

Bitmap fonts (proportional)

Font 21 (10 proportional) ratio 3:3
 Font 22 (18 proportional) ratio 2:2
 Font 23 (26 proportional) ratio 2:2
 Font 24 (56 proportional) ratio 1:1
 Font 28 (40 proportional) ratio 1:1
 Font 29 (8 proportional) ratio 5:5

Vector fonts*

Absender (Baskerville)	Das ist ein Musteretikett
Gold, Petra (Swiss Light)	für die Darstellung der
Name, Vorname (Helvetica Bold)	Schriftarten (Monospace)
Goldstraße 456 (Swiss Light)	
Straße, Hausnummer (Helvetica Bold)	
23456 Golddorf (Swiss Light)	
PLZ, Ort (Helvetica Bold)	
<i>Musterlieferung</i>	Empfänger (Baskerville)
<i>Bitte bestätigen Sie</i>	<u>Mustermann, Max (Helvetica Roman)</u>
<i>den Empfang. (Brush Script)</i>	Name, Vorname (Helvetica Bold)
	<u>Musterstraße 123 (Helvetica Roman)</u>
	Straße, Hausnummer (Helvetica Bold)
	<u>45678 Musterstadt (Helvetica Roman)</u>
	PLZ, Ort (Helvetica Bold)

* only Vario II 107/12

INDEX

A

ANSI, character set	89
Auto status.....	85
Autoload, parameter set	51
Automatic return (cutter), parameter set	75

B

Backfeed, parameter set	51
Bad readings (scanner), parameter set.....	81
Bar code	
Mask set.....	14
Rotation.....	6
Bitmap fonts, font examples	99
Buzzer, parameter set	50

C

Character sets	
ANSI.....	89
Codepage 437	90
Codepage 850	91
Codepage 852	92
Codepage 857	93
GEM Danish.....	98
GEM English.....	95
GEM French.....	96
GEM German.....	94
GEM Swedish	97
General information	87
CODABLOCK F, mask set	19
Codepage 437, character set	90
Codepage 850, character set	91
Codepage 852, character set	92
Codepage 857, character set	93
Codepage selection, parameter set	49
Columns	
Number, parameter set.....	43
Width, parameter set.....	43
Configuration	
Readout	84
Save permanent.....	84
Connector assignment RS485/RS422, serial data transmission	3
Continuous print (dispenser), parameter set.....	80
Contrast, parameter set.....	44
Copy (memory card), parameter set	72
Counter (extended), variables	31
Counter, variables	30
Currency, variable	36
Cutter (option)	
Automatic return.....	75
Offset, parameter set	56, 75
Operating mode	75

D

Data format	
Explanation	8
General information	7

Data memory, parameter set.....	54
DataMatrix, mask set.....	18
Date/time	
Date.....	60
Summer/wintertime	61
Summertime begin.....	62
Summertime end.....	62
Time	60
time shifting.....	62
Variable	32
Datumpoint, setting.....	6
Debounce start signal (dispenser), parameter set	79
Default label On/Off, parameter set.....	51
Device parameters	
Default label On/Off	51
Device settings	
Autoload	51
Backfeed, operating mode	51
Buzzer	50
Codepage selection	49
Display brightness.....	50
External print parameters.....	49
Field handling.....	48
Hotstart.....	50
Keyboard layout	50
Label change confirmation.....	52
Print speed	48
Printer language.....	48
Transfer ribbon control.....	48
User guiding	49
DHCP support, parameter set	70
Directory (memory card)	
Change, parameter set	74
Create, parameter set.....	74
Delete, parameter set	74
Dispenser	
Inputs, parameter set.....	77
Level, parameter set	76
Outputs, parameter set	77
Photocell (status), parameter set.....	47, 80
Photocell (value), parameter set.....	80
Dispenser (option)	
Continuous print.....	80
Debounce start signal	79
Dispenser level	76
Dispenser offset	56
I/O protocol port	78
Input trigger.....	77
Inputs	77
Operating mode	76
Output signal level	77
Outputs	77
Save start signal	80
Software input	78
Software output.....	78
Start signal delay	79
Display brightness, parameter set.....	50

E

Emulation, parameter set	68
Enquire value (label photocell), parameter set	46
Error (readout)	
ID, parameter set	64
Text, parameter set	64
Error (reset), parameter set	64
ETB, parameter set	53
Example	
Graphic, PCX format	28
Mask set	25
Text set	25
External print parameters, parameter set	49

F

Feed, parameter set	67
Field attributes/properties, definition	9
Field handling, parameter set	48
Field names, definition	10
Flip label, parameter set	44
Font examples	
Bitmap fonts (not proportional)	99
Bitmap fonts (proportional)	99
Font examples, vector fonts	99
Format (memory card), parameter set	72
Free memory space (memory card), parameter set	73
Function group (password), parameter set	63

G

Gap length in 1/100 mm, parameter set	42
Gateway address (network), parameter set	69
GEM Danish, character set	98
GEM English, character set	95
GEM French, character set	96
GEM German, character set	94
GEM Swedish, character set	97
Graphic	
General format	26
Internal, mask set	23
PCX format, example	28
PCX format, general information	27
Rotation	6
Save (memory card), parameter set	73
GS1 DataBar (RSS), mask set	20

H

Hotstart, parameter set	50
-------------------------------	----

I

I/O protocol port (dispenser), parameter set	78
Input trigger (dispenser), parameter set	77
Interface	
All interface parameters	53
Date memory	54
Interface protocol	53
Port transmission	54
Scanner, parameter set	81
SOH/ETB	53

Interrogative sets (unknown), reaction	54
IP address (network), parameter set	69
ITF 14, mask set	15

K

Keyboard layout, parameter set	50
--------------------------------------	----

L

Label change confirmation, parameter set	52
Label error length, parameter set	43
Label parameter	
Column width	43
Contrast	44
Flip label	44
Flip/rotate label	45
Gap length in 1/100 mm	42
Label alignment	44
Label error length	43
Label length in 1/100 mm	42
Label photocell	41
Label type	41
Label width in 1/100 mm	42
Material selection	45
Measure label	41
Measure label automatically	42
Number of columns	43
Rotate label	44
Scan position	45
Synchronisation	43
Label photocell	
Enquire value (label photocell)	46
Enquire value (transfer ribbon photocell)	46
Level, maximal	46
Level, minimal	46
Switching threshold	46
Label photocell, parameter set	41
Label width in 1/100 mm, parameter set	42
Labels	
Alignment, parameter set	44
Delete (memory card), parameter set	72
Feed (scanner), parameter set	81
Length in 1/100 mm, parameter set	42
Load (memory card), parameter set	72
Measure, parameter set	41
Save (memory card), parameter set	72
Type, parameter set	41
Language, parameter set	48
Line, mask set	22
Lines (number), parameter set	64
Link field, variables	29

M

MAC address (network), parameter set	70
Mask set	
Bar code	14
CODABLOCK F	19
DataMatrix	18
Example	25
Graphic internal	23
GS1 DataBar (RSS)	20
ITF 14	15

Line	22
MAXICODE	17
PDF417	16
QR Code	21
Rectangle	22
Text	13
Material selection, parameter set	45
MAXICODE, mask set	17
Memory card	
Change directory	74
Copy	72
Create directory	74
Delete directory	74
Delete label	72
Format	72
Free memory space	73
Load label	72
Readout table of contents	73
Save graphic	73
Save label	72
Transfer file from printer	74
Mileage	
Printer, parameter set	59
Printhead, parameter set	59
N	
Netmask (network), parameter set	69
Network (option)	
DHCP support	70
Gateway address	69
IP address	69
MAC address	70
Net mask	69
NTP Server IP	71
Printer name	70
Reset network device	71
Time zone (hour offset)	71
Transmission mode	70
NTP Server IP (network), parameter set	71
O	
Offset values	
Cutter (option) offset	56
Dispenser offset	56
Tear off (offset 4)	55
X displacement (offset 3)	55
Zero point displacement (offset 2)	55
Online/offline, parameter set	57
Operating mode	
Dispenser, parameter set	76
Massicot, parameter set	75
Scanner, parameter set	81
P	
Parallel data transmission	
Connection	5
General information	4

Parameter sets	
Cancel print orders	67
Cutter (option)	75
Date/time	60
Device settings	48
Dispenser (option)	76
Dispensing photocell	47, 80
Emulation	68
Error ID, readout	64
Error text, readout	64
Feed	67
Interface	53
Label parameter	41
Label photocell	46
Memory card (option)	72
Network (option)	69
Offset values	55
Password	63
Printing	64
Quantity (print order)	65
Remote console	68
Reset error	64
Scanner (option)	81
Service functions	57
Start printing	66
Start/stop command	64
Status print	67
Test print	67
Password	
Function group	63
Password	63
PDF417, mask set	16
Photocell (label)	
Level (maximal), parameter set	46
Level (minimal), parameter set	46
Port transmission, parameter set	54
Print	
Speed, parameter set	48
Start, parameter set	66
Print orders (cancel), parameter set	67
Printer name (network), parameter set	70
Printhead	
Lockbar, parameter set	57
Resistance, parameter set	59
Temperature, parameter set	58
Printing, lines	64
Q	
QR Code, mask set	21
Quantity (print order), parameter set	65
R	
Readout table of contents (memory card), parameter set	73
Readout, configuration	84
Rectangle, mask set	22
Reduced print speed, parameter set	58
Remote console	
Interface	68
Sending interval (display contents)	68

Reprint action, parameter set	57
Reset network device (network), parameter set	71
Rotate label, parameter set	44
Rotation	
Bar code	6
Graphic	6
Text	6
RS232	
Assignment, cable	2
Hardware handshake	2
S	
Save permanent, configuration	84
Save start signal (dispenser), parameter set	80
Scan delay (scanner), parameter set	82
Scan length (scanner), parameter set	81
Scan mode (scanner), parameter set	82
Scan offset (scanner), parameter set	81
Scan position, parameter set	45
Scan timeout (scanner), parameter set	82
Scanner (option)	
Bad readings	81
Interface	81
Label feed	81
Operating mode	81
Scan delay	82
Scan length	81
Scan mode	82
Scan offset	81
Scan timeout	82
Variable	83
Sending interval (display contents), parameter set	68
Serial data transmission	
Connection RS232	2
Connector assignment RS485/RS422	3
Connector assignment, DSUB socket	1
Xon/Xoff protocol	1
Service functions	
Lockbar, printhead	57
Mileage, printer	59
Mileage, printhead	59
Online/offline	57
Printhead resistance	59
Reduced print speed (transfer ribbon prior warning)	58
Reprint action	57
Temperature, printhead	58
Transfer ribbon diameter	58
Transfer ribbon prior warning	58
Winder output	57
Shift variable, variables	37
Signal level (output), parameter set	77
Software (dispenser)	
Input, parameter set	78
Output, parameter set	78
SOH, parameter set	53
Start signal delay (dispenser), parameter set	79
Start/stop command, parameter set	64

Status	
Enquiry, data format.....	84
Print, parameter set	67
Return information, data format	84
Summer/wintertime (parameter sets)	
Automatic adjustment.....	61
Summertime begin.....	62
Summertime end.....	62
Time shifting.....	62
Switching threshold, parameter set	46
Synchronisation, parameter set.....	43
T	
Tear off (offset 4), parameter set.....	55
Test print, parameter set	67
Text	
Mask set.....	13
Rotation.....	6
Set, example.....	25
Set, general information.....	24
Time zone (Network), parameter set	71
Time, parameter set	60
Transfer file from printer (Memory card), parameter set	74
Transfer ribbon (parameter sets)	
Control.....	48
Diameter	58
Photocell, value.....	46
Prior warning.....	58
Prior warning diameter.....	58
Transmission mode (network), parameter set.....	70
U	
User guiding	
Parameter set	49
Variable definition	38
V	
Variables	
Counter	30
Currency variable	36
Date/Time	32
Extended counter.....	31
Link field.....	29
Shift variable	37
Text structure	29
User guiding.....	38
Vector fonts, font examples.....	99
W	
Winder output, parameter set.....	57
X	
X displacement (offset 3), parameter set	55
Z	
Zero point displacement (offset 2), parameter set	55